

# **Evidence pack**

## Waikato

June 2025

Version 1.0





#### Copyright information

Copyright ©. This copyright work is licensed under the Creative Commons Attribution 4.0 International licence. In essence, you are free to copy, distribute and adapt the work, as long as you attribute the work to NZ Transport Agency Waka Kotahi (NZTA) and abide by the other licence terms. To view a copy of this licence, visit <a href="http://creativecommons.org/licenses/by/4.0/">http://creativecommons.org/licenses/by/4.0/</a>.

#### **Disclaimer**

NZTA has endeavoured to ensure material in this document is technically accurate and reflects legal requirements. However, the document does not override governing legislation. NZTA does not accept liability for any consequences arising from the use of this document. If the user of this document is unsure whether the material is correct, they should refer directly to the relevant legislation and contact NZTA.

#### More information

NZ Transport Agency Waka Kotahi Published June 2025 Version 1.0

If you have further queries, call our contact centre on 0800 699 000 or write to us:

NZ Transport Agency Waka Kotahi Private Bag 6995 Wellington 6141

## **Contents**

| Introduction  | 5          |
|---|------------|
| What's in the evidence pack?  | 5          |
| What's in this Waikato region section?  | 5          |
| Waikato overview  | 6          |
| Strategic measures – current and future   | 8          |
| Healthy and safe people   | 8          |
| Insights  | 8          |
| Resilience and security   | 9          |
| Insights  | 9          |
| Economic prosperity   | 10         |
| Insights  | 10         |
| Environmental sustainability  | 11         |
| Insights  | 11         |
| Inclusive access  | 12         |
| Insights  | 12         |
| Interdependencies between outcomes  | 13         |
| Current and future challenges   | 14         |
| National context  | 14         |
| Maintaining existing networks   | 14         |
| Access to opportunities and enabling the efficient movement of freight around the | country 14 |
| Resilience to natural hazards and climate change                                  | 15         |
| Congestion and capacity constraints, especially in large and growing cities       | 16         |
| Reducing the level of harm to people and the environment                          | 16         |
| Regional context  | 18         |
| Road safety   | 18         |
| Transport accessibility   | 19         |
| Transport resilience  | 19         |
| Economic growth   | 20         |
| State highway hotspots  | 20         |
| Medium to very high cumulative deficiencies                                       | 21         |
| Medium-high cumulative deficiencies   | 23         |
| Focusing effort   | 24         |
| Longer-term investment focus  | 24         |
|   |            |
| Resilience  | 24         |
| Resilience  |            |
|   | 24         |
| Transport connectivity  | 24<br>24   |

| Short-term investment focus.                         | 25 |
|--|----|
| Resilience   | 25 |
| Transport connectivity                               | 25 |
| Economic and urban development                       | 26 |
| Safety and environment                               | 26 |
| Potential interventions                              | 26 |
| Insights   | 27 |
| Short-list of most effective interventions           | 27 |
| Appendix A: Data sources for the strategic measures  | 28 |
| Healthy and safe people                              | 28 |
| Infrastructure risk rating (safety)                  | 30 |
| Resilience and security                              | 31 |
| Economic prosperity                                  | 32 |
| 5.1.2 Travel time reliability – motor vehicles       | 33 |
| 5.1.3 Travel time delay                              | 33 |
| 5.2.3 Freight – mode share weight – base year 2024   | 34 |
| 5.2.3 Freight – mode share weight – future year 2048 | 34 |
| Environmental sustainability                         | 35 |
| 8.1.1 Greenhouse gas emissions (all vehicles)        | 36 |
| 8.1.3 Light vehicle use impacts                      | 36 |
| Inclusive access                                     | 37 |
| 10.2.1 People – mode share                           | 37 |
| Accessibility to employment                          | 38 |
| 10.3.1 Access to key social destinations (all modes) | 38 |
| Appendix B: Intervention Catalogue                   | 40 |

## Introduction

This Waikato region section is part of the *Evidence pack*, which intended to help in the preparation of the strategic front end of regional land transport plans (RLTPs).

It does this by providing a consistent set of data and information setting out the current and future state of New Zealand's transport system at a national and regional level, and what interventions are likely to be effective to address identified deficiencies.

This iteration (version 1, June 2025) is the first step in the collaborative development with the sector of consistent and comprehensive evidence and information. For future iterations we will be drawing on your feedback to iteratively improve it and close any data and analysis gaps.

For more background information about the evidence pack, see the <u>Introduction and national summary</u>.

## What's in the evidence pack?

The complete evidence pack is available on the Transport Insights portal.

There you will find:


- evidence pack introduction and national summary, which gives you more background to the pack, its purpose and where the information and data are sourced from, and provides an overview for the whole country
- a section for each region, with data and information (calculated as strategic measures) specific to that region, and discussion of how it fits into the national network.

## What's in this Waikato region section?

Each regional section follows the same structure:

- Waikato overview a brief overview of the region.
- Strategic measures which looks at how the region currently rates against the 14 strategic measures from the Land Transport Benefits Framework, and how it's expected to change over time.
- Current and future challenges specific issues for the region to address.
- **Focusing effort** identifies key areas to focus investment in the short and longer term, and includes targeted suggestions of potential interventions.
- Appendices data sources for the strategic measures and more information on potential interventions.

### Waikato overview

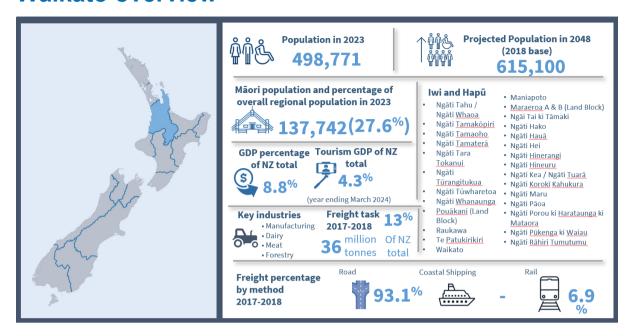

The Waikato region, located in the heart of New Zealand's North Island, is known for its diverse landscapes, including rolling farmland, lush forests, and significant waterways. Covering approximately 25,000 square kilometres, the region's population is projected to grow from around 500,000 to 615,000 by 2048.<sup>1,2</sup>

The region's transport network is crucial for supporting its economy, which is driven by agriculture, dairy, farming, forestry and manufacturing. Key transport routes include SH1, SH29, and SH3, which facilitate the movement of goods and people within the region and to neighbouring areas.<sup>3,4</sup> SH1, SH29, and the East Coast/Main Trunk Lines between Auckland and Tauranga are among the country's busiest and most important freight corridors. The Waikato Expressway, a major infrastructure project, has significantly improved accessibility and reduced travel times between Auckland and Hamilton.<sup>5</sup>

The region's state highway network spans approximately 1750km, with the local road network including 10,100km of roads (of which 2100 are unsealed). The rail network, which is crucial for freight transport, covers 340km.<sup>6</sup> Additionally, the region has a total of 2615 bridges; this includes 1975 bridges on local roads and 640 on state highways.<sup>7</sup>

SH1 is a critical route for the region; it connects Hamilton with other key areas, including Auckland and Taupō, and supports the movement of freight and commuters.<sup>8</sup>

https://kiwirail.maps.arcgis.com/apps/View/index.html?appid=556c4a9c73914fe1983529ddf9ae5099

<sup>&</sup>lt;sup>1</sup> NZTA (2023). Arataki – Regional direction – Waikato. <a href="https://www.nzta.govt.nz/planning-and-investment/planning/arataki/national-and-regional-directions/regional-directions/waikato/">https://www.nzta.govt.nz/planning-and-investment/planning/arataki/national-and-regional-directions/regional-directions/waikato/</a>

<sup>&</sup>lt;sup>2</sup> Waikato Regional Council (2021). Waikato Regional Land Transport Plan (RLTP) 2021–2051. https://www.waikatoregion.govt.nz/services/publications/rltp-2021-2051/

<sup>&</sup>lt;sup>3</sup> NZTA (2023). Arataki – Regional direction – Waikato. <a href="https://www.nzta.govt.nz/planning-and-investment/planning/arataki/national-and-regional-directions/regional-directions/waikato/">https://www.nzta.govt.nz/planning-and-investment/planning/arataki/national-and-regional-directions/regional-directions/waikato/</a>

<sup>&</sup>lt;sup>4</sup> Waikato Regional Council (2023). Transport. <a href="https://www.waikatoregion.govt.nz/services/transport/">https://www.waikatoregion.govt.nz/services/transport/</a>

<sup>&</sup>lt;sup>5</sup> Waikato Regional Council (2023). Transport. <a href="https://www.waikatoregion.govt.nz/services/transport/">https://www.waikatoregion.govt.nz/services/transport/</a>

<sup>&</sup>lt;sup>6</sup> KiwiRail (n.d.) KiwiRail network map.

Figure.NZ (2024). Number of bridges on New Zealand roads. https://figure.nz/chart/nHM7UwJuYIrWnLdT

<sup>&</sup>lt;sup>8</sup> NZTA (2023). Arataki – Regional direction – Waikato. <a href="https://www.nzta.govt.nz/planning-and-investment/planning/arataki/national-and-regional-directions/regional-directions/waikato/">https://www.nzta.govt.nz/planning-and-investment/planning/arataki/national-and-regional-directions/regional-directions/waikato/</a>

The metro area of Hamilton is the main urban centre for the region and where the fastest population growth is happening. This area includes the surrounding towns of Cambridge, Te Awamutu, Ngāruawāhia, and Morrinsville. Historic growth of Hamilton has been largely through urban expansion. In the last 10 years this trend has shifted towards intensification (68 percent) rather than urban expansion (38 percent). Greenfield growth (development of undeveloped areas) will continue to form part of the city's land supply but is expected to reduce over time.

Hamilton is strategically located in the golden triangle between the cities and ports of Auckland and Tauranga. It's a key freight hub and distribution centre for the upper North Island, benefiting from the Waikato Expressway and the North Island and East Coast Main Trunk Lines. The North Island Main Trunk Line and East Coast Main Trunk Line provide key rail links from the metro area to Auckland, Tauranga, and Wellington. The Te Huia rail passenger service operates between Hamilton and Auckland.

The metro spatial plan (MSP) outlines a vision for a significantly different urban future from recent trends. It anticipates 70 percent of growth will be in Hamilton and 30 percent in the townships of Waikato and Waipā. Half the growth is expected through intensification, or concentration, of existing urban areas; 50 percent will require expansion into future urban areas. Employment will be focused at nodes on easily accessible corridors moving people and goods.

Rural communities in the Waikato, such as those in Matamata and Te Awamutu, are heavily reliant on agriculture and dairy farming. These areas produce a significant portion of New Zealand's dairy products and other agricultural goods. SH1 and SH29 are vital for these communities, enabling the efficient movement of goods to markets and ports.<sup>12</sup>

The region's public transport system has seen significant growth in passenger numbers, with a 15 percent year-on-year increase from July 2023 to June 2024. This includes a 20 percent increase in Hamilton, a 12 percent increase in Cambridge, and a 10 percent increase in Te Awamutu.<sup>13</sup>

Challenges facing the region's transport network include limited transport choices, high reliance on private vehicles, and vulnerability to natural hazards such as flooding and landslides. Addressing these challenges is essential for ensuring the region's transport network can support its economic growth and improve the quality of life for residents.<sup>14</sup>

Over the past 2 decades, the Waikato region has seen significant upgrades to its transport network to enhance connectivity, safety, and efficiency. Key projects include the completion of the Waikato Expressway, which has improved traffic flow and reduced congestion in the region. The urbanisation of the SH1 corridor in Hamilton has also been a major development, providing safer routes and supporting local growth. Investments in public transport infrastructure, such as the introduction of new bus routes and the transition to zero-emission public transport, have been pivotal in promoting sustainable transport options.<sup>15</sup>

<sup>&</sup>lt;sup>9</sup> Ministry of Transport (2019). New Zealand Household Travel Survey. <a href="https://www.transport.govt.nz/area-of-interest/public-transport/new-zealand-household-travel-survey">https://www.transport.govt.nz/area-of-interest/public-transport/new-zealand-household-travel-survey</a>

<sup>&</sup>lt;sup>10</sup> Future Proof (2020). Hamilton-Waikato metropolitan spatial plan. https://futureproof.org.nz/h2a/ metrospatialplan/

<sup>&</sup>quot; Future Proof (2020). Hamilton-Waikato metropolitan spatial plan. https://futureproof.org.nz/h2a/ metrospatialplan/

<sup>&</sup>lt;sup>12</sup> NZTA (2023). Arataki – Regional direction – Waikato. <a href="https://www.nzta.govt.nz/planning-and-investment/planning/arataki/national-and-regional-directions/regional-directions/waikato//">https://www.nzta.govt.nz/planning-and-investment/planning/arataki/national-and-regional-directions/regional-directions/waikato//</a>

<sup>&</sup>lt;sup>13</sup> NZTA (2023). Arataki – Regional direction – Waikato. <a href="https://www.nzta.govt.nz/planning-and-investment/planning/arataki/national-and-regional-directions/regional-directions/waikato/">https://www.nzta.govt.nz/planning-and-investment/planning/arataki/national-and-regional-directions/regional-directions/waikato/</a>

<sup>&</sup>lt;sup>14</sup> NZTA (2023). Arataki – Regional direction – Waikato. <a href="https://www.nzta.govt.nz/planning-and-investment/planning/arataki/national-and-regional-directions/regional-directions/waikato/">https://www.nzta.govt.nz/planning-and-investment/planning/arataki/national-and-regional-directions/regional-directions/waikato/</a>

<sup>&</sup>lt;sup>15</sup> NZTA (2023). Arataki – Regional direction – Waikato. <a href="https://www.nzta.govt.nz/planning-and-investment/planning/arataki/national-and-regional-directions/regional-directions/waikato/">https://www.nzta.govt.nz/planning-and-investment/planning/arataki/national-and-regional-directions/regional-directions/waikato/</a>

## **Strategic measures – current and future**

This section provides tables summarising the 14 strategic measures in relation to this region. The data and evidence used to produce these results is included in <u>Appendix A</u>.

The 14 strategic measures are a subset of 60+ measures included in the <u>Land Transport Benefits</u> <u>Framework</u>. They have been selected to provide a coarse but practical overview of the 5 Transport Outcomes, as shown in the diagram.

The tables provide indicative current and future values for the 14 strategic measures (grouped by outcome), to understand how each measure (and therefore outcome) is likely to change if there is no significant investment (beyond that already committed).

More detail about the measures can be found in the Land Transport Benefits Framework measures manual.



## **Healthy and safe people**

| Benefit framework measure                | Units   | Current (2023/24)   | Future (2048) | % Change     |
|--|---|---|---------------|--------------|
| 1.1.1 Collective risk (crash density)    | Average annual fatal and serious per kilometre of road section  | 0.035   | 0.043         | 0.008 (+23%) |
| 1.1.3 Deaths and serious injuries (DSIs) | Number of DSIs (annual)   | 416   | 507           | 91 (+22%)    |
| 1.1.4 Personal risk (crash rate)         | Average annual DSI per 100 million vehicle kilometres travelled | 6.372   | 6.372         | 0 (0%)       |
| 1.2.1 Road assessment rating – roads     | Infrastructure risk rating (applies to both current and future) | High: 21.40% Medium-high: 25.42% Medium: 34.39% Low-medium: 15.15% Low: 3.64% |               | N/A          |

#### Insights

• If there is no significant investment (beyond that already committed), crash density and the number of deaths and serious injuries (DSI) are projected to increase by 2048. Projections are unavailable for other strategic measures for safety but indicate Waikato currently performs poorly for this outcome on those strategic measures.

- Collective risk (crash density) shows where the biggest difference can be made in terms of absolute numbers of DSI and is affected by population size and transport mode chosen. The average annual fatal and serious crashes per kilometre of road section in Waikato are much higher than the national average and the fourth-highest average of all regions. If there is no significant investment (beyond that already committed), crash density is projected to increase by 23 percent in 2048.
- Waikato has the second-highest number of DSI of all regions, with 15 percent of the national total and more than double the average number of DSI of all regions. If there is no significant investment (beyond that already committed), the number of DSI is projected to increase by 22 percent in 2048.
- Personal risk (crash rate) highlights areas where a crash is more likely to occur based on use of the road network and is not affected by population size. The average annual DSI per 100 million vehicle kilometres travelled (VKT) in Waikato is currently higher than the national average and in the middle of the range of all regions.
- Infrastructure risk rating (IRR) describes the underlying level of risk a road presents to an individual road user based on key physical and operational attributes. The proportion of Waikato's roads rated as being at medium-high and high risk (that is, with DSI per 100 million VKT equal to or greater than 8) is 3 percent less than the country as a whole and the fifth-lowest proportion of all regions.

## **Resilience and security**

| Benefit framework measure   | Units  | Current (2023/24)   | Future (2048) | Change |
|---|--|---|---------------|--------|
| 4.1.1 Availability of a viable alternative to high-risk and high-impact route   | Percentage of high-risk, high-impact route with a viable alternative                               | Not included in this release                                | -             | -      |
| 4.1.2 Level of service and risk (note that for<br>this evidence pack this data is from the<br>National Resilience Assessment Tool (NRAT)<br>and includes only state highways) | Number of identified sites in region by combined risk rating (future, geological and hydrological) | Low: 174 Med: 212 High: 175 Critical: 20 Not yet rated: 149 | N/A           | N/A    |

#### Insights

- If there is no significant investment (beyond that already committed), Waikato is projected to have the fifth-highest number of future (emerging) risks. The proportion of high and critical risks indicates Waikato currently performs moderately for this outcome.
- Hazard events at identified risk sites can lead to unplanned closures of the state highway network, impacting network resilience. Waikato is mostly at risk from geological events (rockfall, overslips, underslips), which make up 489 of the 743 resilience risk sites in the region.
- High and critical risks make up 34 percent of all risks in the region rated to date. The proportion of high and critical risks is 3 percent higher than the national rate and in the middle of the range of all regions.

• The risks include 24 sites with future (emerging) risks, as a result of the impact of climate change for example. Waikato has the fifth-highest number of future (emerging) risks of all regions, if there is no significant investment (beyond that already committed).

## **Economic prosperity**

| Benefit framework measure  | Units  | Current (2024)   | Future<br>(2048)                     | Change                               |
|--|--|--|--------------------------------------|--------------------------------------|
| 5.1.2 Travel time reliability – motor vehicles (note for this evidence pack, the data only relates to state highway traffic monitoring system (TMS) sites) | Calculated using coefficient of variation (CoV); standard deviation of travel time divided by average minutes travel time Rate: High <0.3, Medium 0.3–0.6, Low >0.6) | Low: AM 5% Day 5%  Med: AM 0% Day 1%  High: AM 95% Day 95% | Low: N/A%<br>Med: N/A%<br>High: N/A% | Low: N/A%<br>Med: N/A%<br>High: N/A% |
| 5.1.3 Travel time delay (note, data is from the Waikato Regional Transport Model (WRTM).   | Difference between average travel time during AM peak and average travel time during the inter-peak in minutes per kilometre (by mode) as a percentage               | Car: 3%<br>PT: -38%<br>Cycle N/A                           | Car: 4%<br>PT: -8%<br>Cycle: N/A     | Car: 1%<br>PT: 31%<br>Cycle: N/A     |
| 5.2.2 Freight – mode share value   | Percentage of value for each mode  | Not included in this release                               |                                      |                                      |
| 5.2.3 Freight – mode share weight  | Percentage of weight for each mode   | Road: 87%<br>Rail: 13%                                     | Road: 90%<br>Rail: 10%               | Road: 3%<br>Rail: -3%                |

#### Insights

- If there is no significant investment (beyond that already committed), the share of freight carried by road is projected to increase by 2048. A projection is unavailable for travel time reliability, but the moderate travel time reliability in Waikato compared to the national rate and other regions indicate Waikato currently performs moderately for this strategic measure.
- Travel time reliability can impact the efficient movement of people and goods. 5 percent of Waikato's state highway network (limited to data based on where we have TMS sites) has poor travel time reliability (that is, a high CoV), compared to 6 percent for the country as a whole, and is in the middle of the range of all regions. The capability to estimate travel time reliability for future years is still being developed and is intended to be included in later iterations of the evidence pack.
- While road freight is more efficient over short distances, rail freight is safer, lower emissions and more efficient over longer distances. 87 percent of freight in Waikato is carried by road, the same as the national rate and the fifth-lowest rate of all regions. 13 percent of freight in Waikato is carried by rail, the same as the national rate and the fifth-highest rate of all regions. If there is no significant investment (beyond that already committed), the share of freight carried by road is projected to increase by 2048, consistent with the trend for the country as a whole.

 The freight mode share appears to be consistent with forecast higher demand for imports and consumer goods, while primary sector exports are forecast to remain flat.

### **Environmental sustainability**

| Benefit framework measure                     | Units   | Current (2023) | Future (2048) | Change         |
|---|---|----------------|---------------|----------------|
| 8.1.1 Greenhouse gas emissions (all vehicles) | Annual tonnes of CO <sub>2</sub> equivalents (CO <sub>2</sub> -e) emitted | 2.00 m         | 1.36 m        | -0.64 m (-32%) |
| 8.1.3 Light vehicle use impacts               | Annual light vehicle kilometres travelled (light VKT)                     | 5,597 m        | 6,514 m       | +918 m (+16%)  |

#### Insights

- If there is no significant investment (beyond that already committed), Waikato's greenhouse gas (GHG) emissions from all vehicles are projected to reduce significantly (primarily due to a highly uncertain assumed level of vehicle fleet electrification) and light vehicle VKT is projected to increase.
- Land transport is a major contributor to GHG emissions. Waikato accounts for 14 percent of transport GHG emissions in New Zealand. This proportion of the national total is the second-largest contribution of all regions. If there is no significant investment (beyond that already committed), the volume of Waikato's emissions is projected to decrease in 2048, primarily through electrification of the vehicle fleet (as forecast using the Ministry of Transport Vehicle Fleet Model (VFM)). However, the proportion of the national total is projected to increase. However, this assumed level of electrification has high uncertainty, and is a major factor affecting GHG emissions; therefore the calculated 32 percent decrease needs to be considered in this light.
- Light vehicle VKT is currently the largest source of transport GHG emissions. Electrification could be complemented by mode shift to public transport and/or active modes to maximise a reduction of GHG emissions. Waikato accounts for 12 percent of light vehicle VKT in New Zealand. This proportion is the third-highest of all regions. Waikato's volume of light vehicle VKT is projected to increase and the proportion of the national total is projected to remain unchanged in 2048.

#### Inclusive access

| Benefit framework measure                            | Units  | Current               | t (2023)                       |                         |                         | Future                | (2048)                         |                          |                          | Change                         | :                             |                           |                            |
|--|--|-----------------------|--------------------------------|-------------------------|-------------------------|-----------------------|--------------------------------|--------------------------|--------------------------|--------------------------------|-------------------------------|---------------------------|----------------------------|
| 10.2.1 People – mode share                           | Percentage by mode (Census (2023) journey to work and education). Future year data based on WRTM growth factors by mode.                     | PT:<br>Cycle:         | 86.3%<br>2.7%<br>2.5%<br>8.5 % |                         |                         | PT:<br>Cycle:         | 33.2%<br>4.9%<br>4.53%<br>7.4% |                          |                          | Car:<br>PT:<br>Cycle:<br>Peds: | -3.2%<br>2.2%<br>2.1%<br>1.1% |                           |                            |
| 10.3.1 Access to key social destinations (all modes) | Number of jobs (x1000)<br>accessible by mode in<br>AM peak (car 40 min, PT<br>45 min, cycle 45 min) and<br>distance from city centre<br>(km) | Car:<br>PT:<br>Cycle: | 0-5<br>133<br>70<br>105        | 5-10<br>134<br>26<br>83 | 10+km<br>214<br>9<br>17 | Car:<br>PT:<br>Cycle: | 0-5<br>177<br>95<br>141        | 5-10<br>178<br>34<br>112 | 10+km<br>276<br>12<br>21 | Car:<br>PT:<br>Cycle:          | 0-5<br>32%<br>36%<br>34%      | 5-10<br>33%<br>30%<br>36% | 10+km<br>29%<br>33%<br>27% |

#### Insights

- If there is no significant investment (beyond that already committed), the proportion of jobs more than 5km from central Hamilton accessible by public transport and cycling is projected to remain unchanged by 2048. A projection is unavailable for mode share for journeys to work and education, but the moderate proportion of journeys by car in Waikato compared to the national rate and other regions indicate Waikato currently performs moderately for this outcome.
- The availability of public transport services and active mode infrastructure can reduce car dependence, which can be a barrier to access for those who are on low incomes or unable to drive. Journeys to work and education in Waikato by all modes are 9 percent of the national total and this proportion is the fourth-highest of all regions.
- Journeys by car in Waikato are 7 percent higher than the national rate and this proportion is in the middle of the range of all regions.
- Public transport use in Waikato is 5% lower than the national rate and the fifth-highest of all regions.
- The proportion of people cycling in Waikato is lower than the national rate and the third-lowest of all regions.
- The proportion of people walking in Waikato is 2 percent lower than the national rate and in the middle of the range of all regions.
- The accessibility of jobs by modes other than car increases people's ability to work. There are more jobs accessible by car than other modes in Waikato, including much more than by public transport.

- Within 5km of central Hamilton, accessibility by car is approximately double that for public transport and higher than cycling. For locations further out, the difference is greater for both alternate modes. The proportions of jobs more than 5km from central Hamilton accessible by public transport and cycling is projected to remain unchanged by 2048.
- A dispersed urban form in Hamilton and several urban areas around the region means Hamilton is the main centre of employment but not the only one, with people who live further away working more locally. There are few public transport options outside Hamilton. The lowest income households spend a greater proportion of their incomes on transport. These factors combine to result in transport poverty (where people lack adequate access to affordable and reliable transport, hindering their ability to participate in essential activities such as work).

### Interdependencies between outcomes

- Addressing the current and future challenges for one transport outcome can have negative impacts on others. On the other hand, it is possible to take an approach to each outcome that makes a positive impact on the others.
- For example, encouraging a compact urban form in urban areas and facilitating mode shift from light vehicles to public and shared transport in the Waikato region could: reduce exposure to safety risk (see healthy and safe people), reduce emissions (see environmental sustainability), improve access to work and education (see inclusive access), mitigate the long-term impacts of climate change (see resilience and security) and improve the efficient movement of goods (see economic prosperity).
- Shifting to active modes with safe infrastructure for walking and cycling in urban areas could add to these with health benefits.

<sup>&</sup>lt;sup>16</sup> Te Manatū Waka Ministry of Transport (2022). *The distributional impacts of transport-related carbon policy*. <a href="https://www.transport.govt.nz/assets/Uploads/The-Distributional-Impacts-of-Transport-final-report-005.pdf">https://www.transport.govt.nz/assets/Uploads/The-Distributional-Impacts-of-Transport-final-report-005.pdf</a>

## **Current and future challenges**

#### **National context**

New Zealand's transport networks are extensive and vital for the country's connectivity and economic prosperity. The state highway network spans about 11,750km,<sup>17</sup> while the local road network covers about 83,368km.<sup>18</sup> Additionally, the rail network consists of around 4128km of rail lines.<sup>19</sup>

#### Maintaining existing networks

Maintaining such a vast network requires significant effort. Annually, 5–10 percent of the road network (4750km to 9500km) needs resurfacing or rebuilding.<sup>20</sup> The network includes nearly 4200 bridges<sup>21</sup> on state highways and about 15,000 on local roads.<sup>22</sup> Urban growth and higher traffic volumes, especially of heavy vehicles, increase maintenance needs, which strains budgets. Neglecting maintenance can lead to safety risks, higher long-term costs, and disrupted connectivity.<sup>23</sup>

Looking ahead, future challenges are expected to intensify. Climate change is likely to increase the frequency and severity of extreme weather events, such as flooding and heatwaves, which can damage infrastructure and accelerate wear and tear. Technological advancements, such as the rise of electric and autonomous vehicles, may require new types of infrastructure and maintenance protocols. Additionally, population growth and urban sprawl will create pressure to further expand the network, which will lead to increasing the scale and complexity of maintenance operations.

#### Access to opportunities and enabling the efficient movement of freight around the country

The transport system underpins economic and social wellbeing, ensuring access to jobs, education, healthcare, and efficient freight movement. Remote and rural areas face significant access challenges, especially during adverse weather. These challenges include a lack of alternatives to private vehicle trips as public transport services are not a viable alternative because of coverage and frequency. In addition, there is a lack of redundancy in parts of the land transport system – some places rely on one or 2 critical lifelines to stay connected.

Looking ahead, existing access challenges in remote and rural areas will be exacerbated by the impacts of climate change and demographic change. The population is expected to remain static or decline in smaller, rural, and remote districts. In some areas, people aged over 65 are expected to make up more than 35 percent of the population. The affordability of local government rates increases will be an issue in these areas. Network resilience will be further challenged as damage caused by climate change becomes more frequent, outages last longer and repair costs increase. Rural and coastal communities may become increasingly isolated and have difficulty accessing essential services – this may particularly impact Māori.

Freight is a key part of economic activity and is fundamental to making places great to live (liveability).<sup>24</sup> The efficient movement of freight is essential for economic productivity. Current freight

NZ Transport Agency Waka Kotahi

<sup>&</sup>lt;sup>17</sup> NZTA (n.d.). State highway frequently asked questions. <a href="https://www.nzta.govt.nz/roads-and-rail/research-and-data/state-highway-frequently-asked-questions/">https://www.nzta.govt.nz/roads-and-rail/research-and-data/state-highway-frequently-asked-questions/</a>

<sup>&</sup>lt;sup>18</sup> Ministry of Transport (n.d.). Statistics and insights. https://www.transport.govt.nz/statistics-and-insights

<sup>19</sup> Stats NZ (n.d.). Transport. https://www.stats.govt.nz/topics/transport

<sup>&</sup>lt;sup>20</sup> NZTA (n.d.). Road management and maintenance. <a href="https://nzta.govt.nz/roads-and-rail/management-and-maintenance/">https://nzta.govt.nz/roads-and-rail/management-and-maintenance/</a>

<sup>&</sup>lt;sup>21</sup> NZTA (n.d.). Bridges and structures. <a href="https://www.nzta.govt.nz/roads-and-rail/bridges-and-structures/">https://www.nzta.govt.nz/roads-and-rail/bridges-and-structures/</a>

<sup>&</sup>lt;sup>22</sup> Figure.NZ (n.d.). Number of bridges on local roads in New Zealand. https://figure.nz/chart/nHM7UwJuYIrWnLdT

<sup>&</sup>lt;sup>23</sup> Government of New Zealand (n.d.). Government Policy Statement on land transport 2024–34. https://www.transport.govt.nz/assets/Uploads/Government-Policy-Statement-on-land-transport-2024-FINAL.pdf

<sup>&</sup>lt;sup>24</sup> Auckland Transport (2020). Auckland freight plan. https://at.govt.nz/media/1983982/auckland-freight-plan.pdf

inefficiencies such as delays, detours and highly variable travel times can increase costs by up to 20 percent.<sup>25</sup>

Looking ahead, total freight volume is expected to increase by 39 percent by 2053.<sup>26</sup> The location of freight origin and destination may change. A growing population in the largest urban areas means more goods will need to be moved to these locations, and industry and population concentration is occurring in the upper North Island. Climate change is expected to change the nature and location of primary production and increase the frequency of extreme weather events, disrupting transport networks, isolating communities, and affecting freight reliability.<sup>27</sup> Technological shifts, including the rapid growth of e-commerce and the transition to low-emission freight vehicles, will require significant infrastructure upgrades and new logistics strategies to ensure efficiency and sustainability.<sup>28</sup>

#### Resilience to natural hazards and climate change

New Zealand faces significant natural hazard risks, including earthquakes, floods, and cyclones, worsened by climate change. The land transport system has always been exposed to natural hazard risks, with minor closures or delays through small scale events like slips and localised flooding common. However, the network is increasingly exposed to national and regional scale events such as Cyclones Hale and Gabrielle and the Kaikoura earthquakes that caused widespread and significant damage.<sup>29</sup> For instance, Cyclone Gabrielle alone caused damage estimated at \$13.5 billion.<sup>30</sup>

Recovery from small events is quick, but larger events, such as Cyclone Gabrielle, cause extensive damage and long recovery times. The state highway network performs critical lifeline functions for communities, and repeated disruption to these functions impacts communities' access to the services they need.

Looking ahead, the land transport system will have to adapt to escalating impacts from natural hazards and climate change now and into the future. These impacts include sea-level rise and ongoing changes in the physical environment, as well as increasingly severe and frequent climate-related events such as storms, flooding, droughts, and wildfires.<sup>31</sup> The probability of an Alpine Fault earthquake occurring in the next 50 years is 75 percent, and there is a 4 out of 5 chance that it will be a magnitude 8+ event.<sup>32</sup> Such an event has the potential to cause severe damage and disruption across the entire South Island, with major consequences for the rest of the country.

These types of impacts will continue and will affect communities and the transport networks that connect them. As damage becomes more frequent, outages last longer and repair costs increase,

\_

<sup>&</sup>lt;sup>25</sup> Ministry of Transport (2023). Aotearoa New Zealand Freight and Supply Chain Strategy. <a href="https://www.transport.govt.nz/assets/Uploads/MOT4806">https://www.transport.govt.nz/assets/Uploads/MOT4806</a> Aotearoa-Freight-and-Supply-Chain-Strategy-p09-v03.pdf

<sup>&</sup>lt;sup>26</sup> Ministry of Transport (2019). New Zealand transport outlook – Freight model. <a href="https://www.transport.govt.nz/assets/Uploads/Data/Transport-outlook-updated/Freight-Model-Version-2-Documentation-20190423.pdf">https://www.transport.govt.nz/assets/Uploads/Data/Transport-outlook-updated/Freight-Model-Version-2-Documentation-20190423.pdf</a>

<sup>&</sup>lt;sup>27</sup> KPMG & The Aotearoa Circle (2024). *Transport sector climate change scenarios: Report on big climate risks to New Zealand's transport sector*. <a href="https://kpmg.com/nz/en/home/media/press-releases/2024/06/report-on-big-climate-risks-to-new-zealand-s-transport-sector.html">https://kpmg.com/nz/en/home/media/press-releases/2024/06/report-on-big-climate-risks-to-new-zealand-s-transport-sector.html</a>

 $<sup>{}^{28}\,\</sup>text{Ministry of Transport (n.d.)}.\,\,\text{Climate change} --\,\text{emissions work programme.} \\ \underline{\text{https://www.transport.govt.nz/area-of-interest/environment-and-climate-change/climate-change}}$ 

<sup>&</sup>lt;sup>29</sup> Byett, A, et al (2019). *Climate change adaptation within New Zealand's transport system*. Motu Economic and Public Policy Research. <a href="https://www.motu.nz/our-research/environment-and-resources/climate-change-impacts/climate-change-adaptation-within-new-zealands-transport-system">https://www.motu.nz/our-research/environment-and-resources/climate-change-impacts/climate-change-adaptation-within-new-zealands-transport-system</a>

<sup>&</sup>lt;sup>30</sup> NIWA (2024). Cyclone Gabrielle was intensified by human-induced global warming. https://niwa.co.nz/news/cyclone-gabrielle-was-intensified-human-induced-global-warming

<sup>&</sup>lt;sup>31</sup> NZTA (2022). *Tiro Rangi: our climate adaptation plan 2022–2024*. https://www.nzta.govt.nz/assets/resources/tiro-rangi-our-climate-adaptation-plan-2022-2024/tiro-rangi-our-climate-adaptation-plan-20222024.pdf

<sup>&</sup>lt;sup>32</sup> AF8 (2022). *AF8 Programme Strategy* 2022–25. <a href="https://af8.org.nz/media/fpxjy3uu/af8">https://af8.org.nz/media/fpxjy3uu/af8</a> programme-strategy-2022-25-jul22.pdf

rural and coastal communities may become increasingly isolated and have difficulty accessing essential services, and this may especially impact Māori. In urban areas, the impacts of climate change on multimodal networks can be complex, widespread and cascade across the land transport system. Interregional connections will also be disrupted.

#### Congestion and capacity constraints, especially in large and growing cities

New Zealand's road network is a vital part of the country's infrastructure, with significant portions now facing congestion and capacity constraints. This is particularly evident in Auckland, where congestion costs are estimated to range between \$1.3 billion and \$2.6 billion annually.<sup>33</sup>

The demand for transport in New Zealand has grown rapidly, meaning that in some places the demand exceeds the ability of the transport system to cater for it. This has resulted in frequent congestion across parts of the road and public transport networks, particularly on motorways in Auckland, Tauranga, Wellington, Queenstown and Christchurch. Previously confined to 'rush hour' periods, congestion has steadily lengthened and worsened over time.<sup>34</sup> Congestion on the local road network is a growing concern, especially in urban areas. Rail network capacity restraints currently affect both public transport services in Auckland and Wellington, and freight movements across the country. Population growth, dispersed land use patterns, and increasing vehicle ownership will continue to contribute to this issue into the future.

Looking ahead, a growing population in the largest urban areas means more people who need to get to work, education, business and entertainment. New Zealand's population is projected to reach over 6 million by the early 2030s, with much of this growth concentrated in urban areas.<sup>35</sup> This, combined with dispersed land use and rising vehicle ownership – currently at nearly 0.9 vehicles per person – will further strain transport corridors and worsen congestion.<sup>36</sup> Without significant investment, it is likely congestion will worsen, network productivity will fall, and emissions will rise. Future challenges include adapting for electric and autonomous vehicles, building resilience to climate impacts and reducing emissions through urban planning, mode shift and fleet carbonisation.

#### Reducing the level of harm to people and the environment

New Zealand's land transport system faces significant safety and environment challenges. In 2024, there were 292 road fatalities, placing New Zealand 7th highest in road deaths per capita among 35 OECD countries.<sup>37</sup> Contributing factors include adverse weather, unsafe driving behaviour, and poor road conditions. Rural road fatalities are disproportionately high, accounting for 60 percent of all road deaths, despite rural roads making up only 40 percent of the network.<sup>38</sup>

Air pollution from fossil fuels and particulate matter continues to impact public health, contributing to an estimated 2247 deaths in 2016.<sup>39</sup> While low-emission vehicles are essential for reducing transport-related emissions, they are not a complete solution. A broader systems approach – encompassing

https://www.nzta.govt.nz/assets/resources/research/reports/489/docs/489.pdf

 $\underline{\text{https://www.nzta.govt.nz/assets/planning-and-investment/nltp/2024/docs/significant-challenges-nltp-2024-27.pdf}$ 

 $\underline{\text{https://www.nzta.govt.nz/assets/planning-and-investment/nltp/2024/docs/significant-challenges-nltp-2024-27.pdf}$ 

https://www.nzta.govt.nz/assets/planning-and-investment/nltp/2024/docs/significant-challenges-nltp-2024-27.pdf

<sup>&</sup>lt;sup>33</sup> NZTA (2013). The costs of congestion reappraised.

<sup>&</sup>lt;sup>34</sup> NZTA (2024). Significant land transport challenges facing New Zealand.

<sup>&</sup>lt;sup>35</sup> NZTA (n.d.). Significant land transport challenges facing New Zealand.

<sup>&</sup>lt;sup>36</sup> NZTA (n.d.). Significant land transport challenges facing New Zealand.

<sup>&</sup>lt;sup>37</sup> International Transport Forum (2024). Road safety country profile – New Zealand 2023. <a href="https://www.itf-oecd.org/sites/default/files/new-zealand-road-safety.pdf">https://www.itf-oecd.org/sites/default/files/new-zealand-road-safety.pdf</a>

<sup>38</sup> Stats NZ (n.d.). Transport. https://www.stats.govt.nz/topics/transport

<sup>&</sup>lt;sup>39</sup> Emission: Impossible Ltd and the HAPINZ 3.0 team (2022) Key findings from HAPINZ. https://ehinz.ac.nz/projects/hapinz3/key-findings-from-hapinz/

clean energy, sustainable manufacturing, and urban planning – is needed to fully address environmental harm.<sup>40</sup>

The impact on the environment, including climate, on and from the transport network and its use is another pressing issue. The extensive road system crosses many sensitive ecosystems, habitats, and waterways, leading to habitat fragmentation, noise pollution, artificial light, and stormwater discharges.

Looking ahead, climate change is expected to intensify these impacts because of more frequent extreme weather events, increased infrastructure stress, and greater disruption to both human and natural systems. Future challenges will also include managing the environmental footprint of new transport technologies and ensuring that safety improvements keep pace with population growth and the needs of changing demographics (such as people with children), travel patterns (increased travel by older people) and vehicle types, while also taking advantage of new technologies (for example cooperative intelligent transport systems and alternatives to bitumen) to improve safety and environmental outcomes.

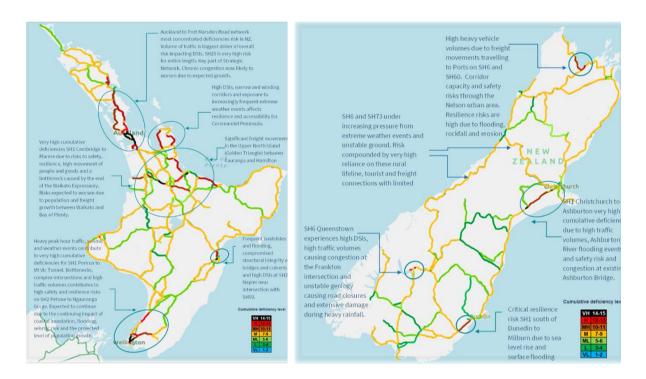


Figure 1: Cumulative (resilience, reliability and safety) deficiencies across the state highway network (source: NZTA data<sup>41</sup>)

-

<sup>&</sup>lt;sup>40</sup> Auckland Council (2022). *Transport emissions reduction pathway*. <a href="https://www.aucklandcouncil.govt.nz/plans-projects-policies-reports-bylaws/our-plans-strategies/Documents/transport-emissions-reduction-pathway.pdf">https://www.aucklandcouncil.govt.nz/plans-projects-policies-reports-bylaws/our-plans-strategies/Documents/transport-emissions-reduction-pathway.pdf</a>

<sup>&</sup>lt;sup>41</sup> Analysis of NZTA National Resilience Assessment Tool (NRAT), NZTA average annual daily traffic and NZTA cumulative risk using DSI data from 2019 to 2023.

### **Regional context**

Waikato's transport network plays a major role in the upper North Island. This area is vital to New Zealand's social and economic success. The upper North Island is home to over half of New Zealand's population and generates more than 50 percent of the national GDP. Nearly 75 percent of the country's population growth over the next 20 years is expected in the upper North Island.



Figure 2: Map of the strategic network in the upper North Island. (source: Arataki)

The Waikato transport network connects to:

- north: SH1 and the North Island Main Trunk line Auckland
- south: SH1 to the central North Island and the North Island Main Trunk line to Wellington
- east: SH2 and the East Coast Main Trunk line to Tauranga and the Bay or Plenty, SH5 to Rotorua and Napier
- west: SH3 to Taranaki.

These connections provide critical links to the rest of New Zealand, urban areas, freight hubs, ports, employment areas and tourist hotspots.

This section discusses the key current and future challenges of the Waikato's transport network, using evidence and insights from NZTA's *Arataki* and regions planning documents. For a list of key transport deficiencies identified in the Waikato region, see the following section.

#### Road safety

Waikato has a particularly poor safety record, with 400 to 450 annual deaths and serious injuries on the region's roads during the past 3 years. 42 There is a particular need to reduce:

- crashes at intersections
- run-off road and head-on crashes
- · crashes involving vulnerable road users, such as people walking or cycling

NZ Transport Agency Waka Kotahi

<sup>&</sup>lt;sup>42</sup> NZTA (2022). Crash Analysis System (CAS). https://nzta.govt.nz/safety/partners/crash-analysis-system

- speeding
- · alcohol and drug impairment
- people not wearing seatbelts.<sup>43</sup>

Safety issues are worsened by the complexity of the network and high proportion of movement on the road network through and within the region.

Long-standing safety, travel time, and reliability issues in Hamilton remain important to address. Hamilton has the country's highest rate of death and serious injury (DSI) involving pedestrians and cyclists, despite the city having overall lower DSI rates than other urban centres.

With minimal intervention, these issues will continue, and the region's poor safety record will remain.

#### Transport accessibility

The region's transport system struggles to provide people of all ages, abilities, and income levels with safe, sustainable and reliable access to a wide variety of social and economic opportunities. High reliance on private vehicles leads to several challenges:

- limited participation in society for those without easy access to a private vehicle
- significant financial pressure on households to meet the high costs of car ownership and use
- limited ability for people to travel in a way that best meets their needs as a result of poor travel choice.

Employment and essential services will likely be concentrated in Hamilton and Auckland. Population growth outside these areas could experience increased trip lengths and reliance on private vehicles unless local services and employment opportunities are provided.

Rural communities need to access key centres for education, employment and essential services. As the population of Waikato ages, travel needs will change; there will be a greater need to access health services, and less need to access education and employment.

An ongoing issue to be addressed is the conflict between heavy volumes of through-traffic versus safety, convenience, and disconnection (severance) in rural towns, such as Tīrau and Putāruru.

With minimal intervention, transport accessibility for all communities will not improve and reliance on private vehicles will remain. This will have consequences across the transport system, including access to social and economic opportunities.

#### **Transport resilience**

Waikato plays a central role in the country's supply chain, and any decline in the resilience and efficiency of key freight networks has national implications. Over the next 30 years, increased rain and storm intensity, coastal erosion, sea level rise, flooding, slips, and storm surges<sup>44</sup> will pose growing risks to road and rail networks. High-risk areas include:

- around Lake Karāpiro
- Coromandel Peninsula
- low-lying areas in the Hauraki Plains
- SH3 link to New Plymouth, particularly in low-lying sections such as around Mōkau, and ice and snow along SH5 (Kaweka Ranges), the key link to Hawke's Bay.

Hamilton, as an inland city, won't be impacted by sea level rise like many other centres. However, it will likely be impacted by more extreme weather events, rising temperatures, and increased drought conditions. Some areas of the Waikato River are prone to flooding and have at times required the closure of cycleways in the city. It's expected more slips and closures will likely occur with high rainfall

-

<sup>&</sup>lt;sup>43</sup> NZTA (2022). Crash Analysis System (CAS). <a href="https://nzta.govt.nz/safety/partners/crash-analysis-system">https://nzta.govt.nz/safety/partners/crash-analysis-system</a>

<sup>&</sup>lt;sup>44</sup> Ministry for the Environment (n.d.). Climate projections map. Climate Data Initiative. <a href="https://map.climatedata.environment.govt.nz/">https://map.climatedata.environment.govt.nz/</a>

and more extreme weather events – this will place increased pressure on the transport system. Hamilton also has low exposure to earthquakes and volcanic activity.

Awareness of urgency for climate change action and emission reduction has increased significantly in recent years. Larger urban areas, such as Hamilton, provide the greatest opportunity to reduce transport emissions. Reduced traffic flows will achieve wider benefits such as better health, safety, congestion-relief, and quality of life. Hamilton has the fourth highest transport emissions of the country's cities.

The Waikato Expressway now bypasses Hamilton, freeing up capacity on the urban networks that can be used to support local journeys by sustainable modes. Future growth patterns will incentivise urban concentration to reduce vehicle kilometres travelled and avoid peripheral car-based growth linked to the expressway. This will also help preserve the important national function of the Waikato Expressway.

There are opportunities to progress multiple outcomes by investing in maintenance and renewals, but this may require changes to current practices and priorities. Without this investment, the resilience and efficiency of key freight networks may be compromised and the country's supply chain impacted. To be resilient, the region's transport system must be able to adapt to uncertainty and rapid change.

#### **Economic growth**

The region is strategically located in the upper North Island and is part of the golden triangle (Auckland, Hamilton, and Tauranga). This is important for the national economy by delivering safe, reliable interregional journeys, especially road and rail freight connections to key ports, including the inland rail ports and hubs of Hamilton. The Te Huia rail passenger service operates between Hamilton and Auckland.

The transition to a low-emissions economy may result in land-use changes, particularly for dairying, with flow-on effects for freight movement. Continuing to provide reliable and resilient access to employment, education, and essential services will support a productive and growing regional economy as this transition occurs. would

Access to urban areas rely on long and increasing commuting distances – this won't help the region achieve low-emissions goals. Instead, urban areas should seek greater concentration of housing and look to grow industries outside of farming.

## State highway hotspots

The following data sets have been overlaid to identify 'hotspots' on the state highway network:

- Reliability: Measured by average annual daily traffic (AADT), which calculates the total number of vehicles, including heavy vehicles, passing through traffic count sites. High to medium reliability issues are identified when highways frequently operate at or near their capacity of 20,000 vehicles per day.
- **Resilience**: Assessed by examining the risk of disruptions across the state highway network over the past 12 years.
- **Safety**: Derived from the NZTA Collective Risk Map, which uses historical crash data from 2019 to 2023 to identify areas with higher accident risks.

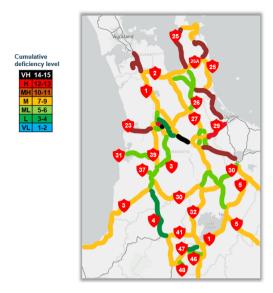


Figure 3: Cumulative deficiencies across the state highway network in the Waikato region (source: NZTA data<sup>45</sup>)

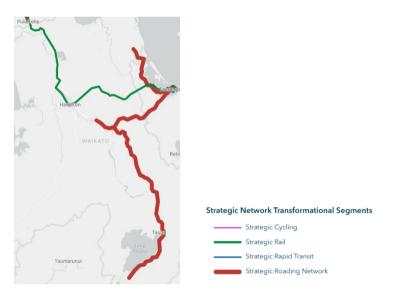


Figure 4: Arataki strategic network where transformational change is required (source: Arataki)

### Medium to very high cumulative deficiencies

Waikato region currently has some key corridors with road sections that have medium-high, high or very-high cumulative deficiencies. These include sections of SH1, SH29, and SH5.

**SH1** in the Waikato region is highly vulnerable to weather-related disruptions such as flooding and slips. These conditions require frequent maintenance, leading to closures and detours that affect journey reliability. Safety is a major concern because of the network's complexity and high traffic volumes. Crashes are common, especially at intersections and during adverse weather. Regular

NZ Transport Agency Waka Kotahi

<sup>&</sup>lt;sup>45</sup> Analysis of NZTA National Resilience Assessment Tool (NRAT), NZTA average annual daily traffic and NZTA cumulative risk using DSI data from 2019 to 2023.

maintenance and repair work, including full closures for essential repairs, can cause significant delays and detours, impacting journey reliability on this nationally critical route.<sup>46</sup>

**SH29** is another crucial corridor in the Waikato region, facing its own set of challenges. The road is prone to delays and congestion, particularly at key intersections such as the SH29/SH1 intersection at Pairere. The condition of the road and the need for frequent maintenance can disrupt travel, especially during peak times. Safety issues are prevalent on SH29, especially over the Kaimai Range, where weather conditions can make driving hazardous. High-risk areas require ongoing attention, and planned safety improvements, including roundabouts and road widening, aim to address these issues. Traffic delays and congestion are common, particularly at major intersections and during maintenance work. Given the road's national importance for freight traffic, any disruptions can have significant impacts on journey reliability.<sup>47</sup>

**SH5** also faces considerable challenges, particularly from weather-related disruptions such as slips and flooding in areas such as Tīrau to Tārukenga. The road's condition necessitates ongoing maintenance, which can impact travel times and reliability.

Some of the initiatives to address these issues include:

- SH1 Road of National Significance (RoNS) Cambridge to Piarere
- Hamilton Southern Links
- SH1 commercial vehicle regional safety centre
- SH1 Bulli Point
- SH1 Piarere to Taupō
- SH1 Taupō to Desert Road
- SH1/SH29 intersection improvements
- acceleration of road renewal on SH1 between Piarere and just north of Tīrau<sup>48</sup>
- Tauriko West Project: the replacement of the Ōmanawa Bridge and realignment of connections on SH29 around the bridge <sup>49</sup>
- new intersections at Tauriko Village and Redwood Lane<sup>50</sup>
- widening of SH29A and the construction of a new grade-separated interchange at Barkes Corner<sup>51</sup>
- SH5 Tīrau to Tārukenga safety improvements, including roundabouts at key intersections and the installation of wide centre lines.<sup>52</sup>

All strategic network roads with potential interventions identified that are over and above maintenance, operations and renewals (MOR), have activities allocated that will mitigate the cumulative deficiencies for those sections. For example, the RoNS between Cambridge and Piarere, SH1/SH29 intersection improvements, work on the SH1 at Bulli Point, and committed safety improvement activities between Cambridge and Tokoroa on SH1.

Safety is a major concern on **SH1C** in **central Hamilton**. This state highway serves as a major arterial route, connecting key destinations such as Hamilton Gardens and Waikato Hospital. The high volume of both commuter and freight traffic exacerbates congestion, particularly during peak hours.

<sup>&</sup>lt;sup>46</sup> NZTA (2009). Regional summary Waikato. <a href="https://nzta.govt.nz/resources/national-land-transport-programme-nltp/2009-12/regional/waikato/regional-summary/">https://nzta.govt.nz/resources/national-land-transport-programme-nltp/2009-12/regional/waikato/regional-summary/</a>

<sup>&</sup>lt;sup>47</sup> NZTA (2009). Regional summary Waikato. <a href="https://nzta.govt.nz/resources/national-land-transport-programme-nltp/2009-12/regional/waikato/regional-summary/">https://nzta.govt.nz/resources/national-land-transport-programme-nltp/2009-12/regional/waikato/regional-summary/</a>

<sup>&</sup>lt;sup>48</sup> NZTA (2024). Accelerated SH1 road renewal to begin in Waikato. <a href="https://www.nzta.govt.nz/media-releases/accelerated-sh1-road-renewal-to-begin-in-waikato/">https://www.nzta.govt.nz/media-releases/accelerated-sh1-road-renewal-to-begin-in-waikato/</a>

<sup>49</sup> NZTA (n.d.). Tauriko West. https://www.nzta.govt.nz/projects/tauriko-west/

<sup>&</sup>lt;sup>50</sup> NZTA (2025). SH29 Tauriko Enabling Works project driving towards major milestones. https://www.nzta.govt.nz/media-releases/sh29-tauriko-enabling-works-project-driving-towards-major-milestones/

<sup>&</sup>lt;sup>51</sup> NZTA (n.d.). Tauriko West. <a href="https://www.nzta.govt.nz/projects/tauriko-west/">https://www.nzta.govt.nz/projects/tauriko-west/</a>

<sup>&</sup>lt;sup>52</sup> NZTA (2025). SH5 road rebuild between Oturoa Road, Rotorua and South Waikato. https://www.nzta.govt.nz/media-releases/sh5-road-rebuild-between-oturoa-road-rotorua-and-south-waikato/

There is a high incidence of crashes, particularly at intersections and during adverse weather conditions. For example, in 2023, there were 120 reported crashes on SH1C, with 15 resulting in serious injuries. The intersection of SH1C Cobham Drive and Cambridge Road was identified as a high-risk area because of its previous roundabout configuration, which was a pinch point for traffic and posed safety risks for pedestrians and cyclists. Despite safety improvements, such as the installation of traffic signals and raised intersection platforms, crashes remain a concern, particularly involving vulnerable road users. The proximity of schools and residential areas adds to the complexity. Currently there are no projects or activities proposed that would alleviate the deficiency ratings for these 2 sections of the road, noting that both two-lane sections carry over 26,000 vehicles per day.

#### Medium-high cumulative deficiencies

**SH23 from Hamilton to Raglan** is a high-risk rural road with frequent crashes, including 5 deaths and 64 serious injuries from 2013 to 2022. Common crash types include vehicles crossing the centre line, head-on collisions, and losing control on bends.<sup>55</sup> In January 2023, SH23 suffered significant damage from a major storm event, leading to a serious slip on the Raglan Deviation. This resulted in a 30-meter section of the highway dropping around 2.5 meters, necessitating the construction of a temporary diversion road.<sup>56</sup> High traffic volumes and ongoing maintenance needs affect reliability, with around 6000 vehicles daily from Hamilton to Whatawhata, dropping to 4000 towards Raglan.<sup>57</sup>

**SH25** is one of the most dangerous state highways in New Zealand, with a high number of deaths and serious injuries per kilometre. Between 2013 and 2022, there were 6 fatalities and 35 serious injuries on this route.<sup>58</sup> The road's narrow, winding sections and variable speed limits contribute to its high-risk status.<sup>59</sup>

The resilience of SH25 is severely impacted by its exposure to extreme weather events. In early 2023, Cyclones Gabrielle and Hale caused extensive damage, resulting in more than 50 major slip sites and surface flooding at multiple locations. The road network was left in a fragile state, requiring significant repair and maintenance efforts. The total cost of rebuilding and repairing SH25 is estimated at \$21 million for the 2024/25 financial year.<sup>60</sup>

\_

<sup>&</sup>lt;sup>53</sup> NZTA (2023). SH1C Cobham Drive and Cambridge Road intersection improvements. https://nzta.govt.nz/projects/sh1c-cobham-drive-and-cambridge-road-intersection-improvements/

<sup>&</sup>lt;sup>54</sup> NZTA (2025). SH1C (Cobham Drive/Thermal Explorer Highway) Hamilton. https://www.nzta.govt.nz/safety/driving-safety/speed/state-highway-speed-management/future-new-speed-reviews-under-the-2024-rule/new-consultation-on-urban-connectors/waikato/sh1c-cobham-drivethermal-explorer-highway-hamilton/

<sup>&</sup>lt;sup>55</sup> NZTA (2024). State Highway 1C Hamilton Raised Safety Platforms. <a href="https://www.citywatchnz.org/wp-content/uploads/2023/12/FINAL-SH1C-Rifle-Range-Rd-RSPs-Dec-23-Copy.pdf">https://www.citywatchnz.org/wp-content/uploads/2023/12/FINAL-SH1C-Rifle-Range-Rd-RSPs-Dec-23-Copy.pdf</a>

<sup>&</sup>lt;sup>56</sup> NZTA (2023). SH23 Road to Raglan update. <a href="https://www.nzta.govt.nz/media-releases/sh23-road-to-raglan-update/">https://www.nzta.govt.nz/media-releases/sh23-road-to-raglan-update/</a>

<sup>&</sup>lt;sup>57</sup> NZTA (2025). SH1C (Cobham Drive/Thermal Explorer Highway) Hamilton. https://www.nzta.govt.nz/safety/driving-safely/speed/state-highway-speed-management/future-new-speed-reviews-under-the-2024-rule/new-consultation-on-urban-connectors/waikato/sh1c-cobham-drivethermal-explorer-highway-hamilton/

<sup>&</sup>lt;sup>58</sup> NZTA. (2025). SH25/SH25A Thames-Coromandel. <a href="https://www.nzta.govt.nz/projects/sh25-sh25a-thames-coromandel/">https://www.nzta.govt.nz/projects/sh25-sh25a-thames-coromandel/</a>

<sup>&</sup>lt;sup>59</sup> NZTA (2023. New temporary speed reductions to increase safety for Coromandel. <a href="https://nzta.govt.nz/media-releases/new-temporary-speed-reductions-to-increase-safety-for-coromandel/">https://nzta.govt.nz/media-releases/new-temporary-speed-reductions-to-increase-safety-for-coromandel/</a>

SunLive (2024). Coromandel \$25M transport request rebuffed. <a href="https://www.sunlive.co.nz/news/352174-coromandel--25m-transport-request-rebuffed.html">https://www.sunlive.co.nz/news/352174-coromandel--25m-transport-request-rebuffed.html</a>

The reliability of SH25 is compromised by frequent closures and detours as a result of weather-related damage. The closure of SH25A in January 2023 led to increased traffic on SH25, making congestion and travel delays worse.<sup>61</sup>

There are improvement activities planned for SH23 and SH39 intersection and the Coromandel network resilience cyclone rebuild that will address some of the deficiencies.

Some of the initiatives to address these issues include:

- SH25 Grahams Stream Bridge (Tairua) (proposed improvement)
- SH25 Boundary Creek Bridge end-of-life (EOL) replacement (proposed improvement)
- SH25 Ramarama Streat Bridge EOL replacement (proposed improvement)
- SH25 Pepe Stream Bridge EOL replacement (proposed improvement)
- SH25 Pepe Stream Bridge replacement (committed improvement)
- SH23 and SH39 IS (committed improvement).

## **Focusing effort**

Note: this section has a high-level strategic focus; we'll develop more specificity in future iterations of the evidence pack.

Based on the preceding sections and consideration of regional investment priorities identified in regional documents, the following list of areas of investment focus have been identified.

## Longer-term investment focus

#### Resilience

- Investigate options for critical transport corridors away from high-risk areas in the face of natural hazards such as relocation and extension of routes – this includes working with communities to identify plans for when to defend, accommodate, or retreat.
- Progress and invest in long-term corridor protection as per the Hamilton-Waikato Metro Spatial Plan (MSP) to shape the city's future urban form.

#### **Transport connectivity**

- Improve interregional connectivity between Waikato and Bay of Plenty, and enhance passenger rail between Waikato and Auckland.
- Create connected walking and cycling networks in urban areas this includes the completion of cycling networks in Hamilton and improved active-mode facilities in smaller towns.
- Continue to make changes to the allocation of space on existing roads and streets to enable and encourage mode shift to public transport, walking, and cycling.
- Deliver an integrated public transport network.

#### **Economic and urban development**

- Continue aligning transport investments with urban development plans supporting, enabling, and encouraging growth and development in areas that have good travel choices and shorter trip lengths.
- Explore opportunities to move to a more multi-modal freight system with greater use of rail and coastal shipping.
- Better understand the impact of future socio-economic transformation on travel patterns and freight volumes.

-

<sup>&</sup>lt;sup>61</sup> NZTA (2023). New temporary speed reductions to increase safety for Coromandel. <a href="https://nzta.govt.nz/media-releases/new-temporary-speed-reductions-to-increase-safety-for-coromandel/">https://nzta.govt.nz/media-releases/new-temporary-speed-reductions-to-increase-safety-for-coromandel/</a>

 Focus on improving travel in and around key destinations with complex transport interconnections, especially interregional connections, town centres and key freight and industrial hubs.

#### Safety and environment

- Continue to invest in safety infrastructure, education, enforcement, and incentives that significantly reduce harm caused by the region's transport system.
- Focus improvement on local corridors that have safety deficiencies across multiple modes.
- Deliver interventions, activities, and investments needed to achieve vehicle kilometres travelled (VKT) and emissions reduction across the region.
- Continue to reduce the environmental impact of the maintenance, operations and improvement across the transport network, including waste minimisation and resource efficiency.

#### Community and accessibility

- Work with iwi/hapū partners to improve or maintain, as appropriate, physical access to marae, papakāinga, wāhi tapu, and wāhi taonga.
- Continue to improve the design and provision of transport infrastructure and services to meet the needs of people of all ages and abilities, focusing on communities with unmet needs.
- Continue to improve access to social and economic opportunities, especially by public transport, walking, and cycling, so these low-cost, sustainable, and healthy travel options are safely used for more journeys.
- Explore opportunities to support the mobile or digital delivery of essential services.

#### **Short-term investment focus**

Projects in the shorter term typically will involve low-cost, low-risk, high-effectiveness improvements and projects that 'set the scene' to incrementally enable (or transition to) longer-term outcomes.

Steps to make progress towards transport outcomes in a more efficient and cost-effective way include:

- renewing the focus on small-scale projects
- getting more from existing infrastructure, by making the most of existing networks, services, and demand management
- reallocating existing road space, particularly for public transport and active modes
- seeking continuous improvement in network resilience through maintenance, renewals, and low-cost, low-risk investments
- influencing travel behaviour and growth patterns.

#### Resilience

- Develop an understanding of routes that provide critical connections, the conditions of these, the pressures, and the level of investment needed to address impacts.
- Investigate whether MOR and the targeted cyclone rebuild work will be sufficient to maintain the required level of performance over the next 30 years.
- Identify transport assets and infrastructure at risk of natural hazards and impacts of climate change, identifying priorities for network resilience and options for alternate routes less likely to be disrupted.

#### **Transport connectivity**

 Plan for the Taupō to Tūrangi Road corridor to identify a preferred long-term solution and progressive programme of implementation.

- Long-term planning exercise to identify preferred long-term rail and road solutions along corridor between Hamilton and Tauranga.
- Expand and improve walking and cycling facilities and infrastructure.
- Maintain and improve the resilience and efficiency of road and rail connections to surrounding regions.
- Accelerate the delivery of walking, cycling and micro-mobility networks with a focus on costeffectively completing existing planned networks in Hamilton and reshaping existing streets, to make these options safe and attractive.

#### **Economic and urban development**

- Confirm route, detailed form, staging, and refine integrated urban-development outcomes for Hamilton mass rapid transit.
- Investigate first- and last-mile freight solutions in key activity centres.
- Support multi-modal, resilient, reliable, and efficient freight and business travel around key parts of the network, especially interregional connections, and key freight and industrial hubs.
- Support safe and reliable movement of visitors across the region.
- Implement the short- to medium-term transport network elements of the Hamilton-Waikato Metro Spatial Plan and integrated transport programme (including Access Hamilton).

#### Safety and environment

- Progress programme of implementation for Cambridge to Piarere.
- Continue safety improvements that target high-risk intersections, run-off road crashes, high-volume roads, and head-on crashes on high-risk rural roads, particular focus on SH2 Pokeno to Mangatarata and SH29 Piarere to Te Poi/Te Poi to Kaimai Summit.
- Address safety challenges in non-protected areas of existing cycling and walking networks.
- Plan what interventions, activities, and investments are needed to achieve vehicle kilometres travelled (VKT) and emissions reduction, focusing on Hamilton.
- Reduce the environmental impact of the maintenance, operations and improvement across the transport network by supporting and enabling low-emission, low-carbon and low-impact policies, practices, and standards.

#### **Potential interventions**

As part of the PIE programme, NZTA is developing the Intervention Catalogue (IC) tool, which compiles a wide range of empirical data relating to the implementation of transport projects and how effective they have been in achieving the intended outcomes. We'll continue to add to this over time, using data from benefit realisation associated with the investment logic mapping (ILM) process.

An Al interface for supporting queries and providing relevant evidence is currently being investigated.

An example of how exploratory use of this tool might be used to match potential interventions to deficiencies to understand and compare the likely relative effectiveness is included in <a href="Appendix B">Appendix B</a>.

The process seeks to avoid potential pitfalls that might occur during option formulation:

- an over-reliance on preconceived ideas
- a focus on the more obvious supply-side measures, such as infrastructure and management rather than demand-side measures such as regulation and pricing
- a general lack of awareness of the wider range of policy measures available
- lack of evidence of the performance of those measures in other contexts
- lack of a formalised or consistent approach for option generation.

The example tables included in <u>Appendix B</u> take the focus areas and related transport issues from the previous section of this report and maps them to some relevant interventions from the KonSULT knowledgebase.

#### Insights

Using IC is only intended to inform the option formulation process. It does not replace the need for judgement, but rather provides a set of empirical evidence that supports decisions (along with additional information sources).

The tables in Appendix B indicate the following:

- Most interventions related to addressing the identified Waikato deficiencies are likely to be cost effective.
- Most interventions have mostly a positive (or neutral) effect across all outcomes, much more so than negative.
- A wide range of interventions for Waikato indicated by IC include:
  - new infrastructure (safe systems)
  - o new infrastructure and maintenance (resilience)
  - new infrastructure (PT)
  - new Services (PT passenger rail)
  - o walking and cycling network improvements
  - o road space reallocation
  - o spatial and place-based planning.

#### Short-list of most effective interventions

It is intended that the information and tools provided above will assist consideration and development of projects to be included in the next RLTP and NLTP.

It provides a starting point for us to understand regional issues and investment opportunities, which can then be expanded upon through further engagement between approved organisations and NZTA to increase the likelihood of suitable projects being submitted for funding via the NLTP.

## Appendix A: Data sources for the strategic measures

This appendix references all relevant data sources and assumptions for the <u>14 strategic measures</u> reported within each regional chapter.

Because this is the first attempt at providing the evidence pack, and the development of the associated tools and processes under the Planning and Investment Evidence base (PIE) programme is still ongoing, we do not yet have the full capability to report outputs for all measures, particularly for future years. In these instances, we have noted that the data is 'not available' by using the 'N/A' abbreviation as a placeholder until such time this can be addressed by a subsequent version of the evidence pack.

Similarly, the process has identified the need for better understanding and reporting of data quality ratings, version control and internal consistency (that is, a single source of truth). These are all things we intend to improve in subsequent releases.

Bearing the above in mind, we have adopted the following general convention for this version in how we report numbers:

- For large numbers, only report 3–4 significant figures (and using rounding units of thousands or millions).
- For small numbers (including percentages), report to one decimal place by default, but make exceptions where appropriate (for example where more or less detail is required to make meaningful comparisons).

The focus is on convenience and the useability of the data. As such, it doesn't necessarily imply a particular level of accuracy (especially for future year forecasts, which have a great deal of uncertainty associated with them).

Each section below (grouped by outcome) provides data for all regions to allow comparison in terms of how each region contributes to the national total. It also provides any important caveats and limitations associated with each of the measures for that outcome.

## Healthy and safe people

To understand the current and future safety risk both at the regional and national level, we calculated deaths and series injuries, personal risk and collective risk as shown in the following table. More details can be found in the Land Transport Benefits Framework.

| Benefit framework measure                | Units  |
|--|--|
| 1.1.1 Collective risk (crash density)    | Average annual fatal and serious per kilometre of road section |
| 1.1.3 Deaths and serious injuries (DSIs) | Number of DSIs (annual)  |
| 1.1.4 Personal risk (crash rate)         | Average annual DSI per 100 million vehicle kilometres          |

#### Notes, caveats and data limitations:

- Data for the number of deaths and series injuries (DSIs) is sourced from the Crash Analysis System (CAS) database managed by NZTA.
- Regional VKTs and network length in kilometres is sourced from the NZTA official data published for financial year 2023/24.<sup>62</sup>
- Generally, DSI measures are calculated as multi-year rolling average. However, because of time
  and resource constraints the following data is for the financial year 2023/24 only.

-

<sup>62</sup> https://www.nzta.govt.nz/planning-and-investment/learning-and-resources/transport-data/data-and-tools/

- Future year growth factor is based on regional VKT change. This method to calculate this change is discussed in more detail for the 'E.4 Environmental sustainability' section later in this appendix.
- It is assumed that crash rates remain constant over time. This is consistent with safety expert advice that application of crash trend adjustment factors for long term future predictions may no longer be supported by evidence.
- Future year DSIs were estimated based on the regional change on VKT (all vehicles) between 2023 and 2048 adopted for the GHG emissions measure (8.1.1). This assumes the crash rate (per VKT) remains constant (that is, no crash trend reduction factors applied).

| Region                  | Current 2023 | /24    |                           | Future 2048 |        |                           |
|-------------------------|--------------|--------|---------------------------|-------------|--------|---------------------------|
|                         | DSIs #       | Per km | Per 100<br>million<br>VKT | DSIs#       | Per km | Per 100<br>million<br>VKT |
| 01 – Northland          | 181          | 0.027  | 7.783                     | 176         | 0.026  | 7.554                     |
| 02 – Auckland           | 593          | 0.073  | 4.267                     | 924         | 0.114  | 6.651                     |
| 03 – Waikato            | 416          | 0.035  | 6.372                     | 501         | 0.042  | 7.678                     |
| 04 – Bay of Plenty      | 184          | 0.038  | 5.321                     | 210         | 0.044  | 6.059                     |
| 05 – Gisborne           | 33           | 0.015  | 7.779                     | 37          | 0.016  | 8.737                     |
| 06 – Hawke's Bay        | 125          | 0.027  | 7.005                     | 145         | 0.031  | 8.135                     |
| 07 – Taranaki           | 82           | 0.021  | 6.293                     | 97          | 0.024  | 7.429                     |
| 08 – Manawatū-Whanganui | 234          | 0.026  | 7.718                     | 231         | 0.026  | 7.619                     |
| 09 – Wellington         | 171          | 0.039  | 4.671                     | 230         | 0.052  | 6.289                     |
| 10 – Top of the South   | 117          | 0.027  | 6.868                     | 151         | 0.035  | 8.848                     |
| 11 – Canterbury         | 346          | 0.021  | 5.007                     | 480         | 0.030  | 6.942                     |
| 12 – West Coast         | 43           | 0.014  | 7.548                     | 43          | 0.014  | 7.545                     |
| 13 – Otago              | 137          | 0.013  | 4.799                     | 142         | 0.013  | 4.968                     |
| 14 – Southland          | 51           | 0.007  | 3.877                     | 53          | 0.007  | 4.024                     |
| 15 - Chatham Islands    | 0            | 0.000  | 0.000                     | 0           | 0.000  | 0                         |
| National                | 2713         | 0.025  | 5.451                     | 3419        | 0.035  | 5.055                     |

#### Infrastructure risk rating (safety)

We calculate strategic measure 1.2.1 Road assessment rating to understand the current situation of infrastructure risk both at regional and national level. This measure can be used for any safety-related investment benefits, particularly those that target road infrastructure to improve safety. It is a comprehensive measure that considers land use, road type, alignment, average annual daily traffic (AADT), intersection density, land and shoulder width, roadside hazards and access density. More details can be found in the Land Transport Benefits Framework.

| Benefit framework measure            | Units                              |
|--------------------------------------|------------------------------------|
| 1.2.1 Road assessment rating – roads | Average infrastructure risk rating |

#### Notes, caveats and data limitations:

- Data to calculate the regional infrastructure risk rating (IRR) measure in the following table is sourced from Megamaps, which is a geospatial platform managed by NZTA.<sup>63</sup>
- IRR data used to calculate regional and national measure values in the following table was calculated in Megamaps in 2024. The raw data used is for the period 2019–23.
- The data in Megamaps is for each road segment, intersection or corridor. We have aggregated it to calculate regional percentages under each risk band.

| Region                  | High   | Medium-<br>high | Medium | Low-<br>medium | Low    |
|-------------------------|--------|-----------------|--------|----------------|--------|
| 01 – Northland          | 45.77% | 26.44%          | 18.74% | 8.34%          | 0.71%  |
| 02 – Auckland           | 14.92% | 17.54%          | 48.12% | 13.18%         | 6.24%  |
| 03 – Waikato            | 21.40% | 25.42%          | 34.39% | 15.15%         | 3.64%  |
| 04 – Bay of Plenty      | 17.10% | 20.74%          | 37.82% | 19.35%         | 4.99%  |
| 05 – Gisborne           | 50.43% | 19.93%          | 21.93% | 7.50%          | 0.21%  |
| 06 – Hawke's Bay        | 33.47% | 25.30%          | 29.79% | 9.16%          | 2.28%  |
| 07 – Taranaki           | 28.83% | 24.08%          | 33.13% | 13.13%         | 0.83%  |
| 08 – Manawatū-Whanganui | 41.81% | 19.13%          | 25.67% | 12.43%         | 0.96%  |
| 09 – Wellington         | 17.98% | 19.51%          | 41.67% | 13.62%         | 7.22%  |
| 10 – Top of the South   | 33.70% | 23.83%          | 28.06% | 12.94%         | 1.47%  |
| 11 – Canterbury         | 10.87% | 29.16%          | 42.29% | 16.36%         | 1.32%  |
| 12 – West Coast         | 17.75% | 29.97%          | 38.04% | 13.61%         | 0.63%  |
| 13 – Otago              | 21.83% | 37.95%          | 26.55% | 12.63%         | 1.04%  |
| 14 – Southland          | 6.99%  | 41.27%          | 37.99% | 13.34%         | 0.42%  |
| National%               | 23.21% | 2.29%           | 13.50% | 34.25%         | 26.75% |

<sup>63</sup> https://spatial.nzta.govt.nz/apps/megamaps/

## Resilience and security

This transport outcome is about minimising and managing the risks from natural and human-made hazards, anticipating and adapting to emerging threats, and recovering effectively from disruptive events. We intended to use strategic measure 4.1.1 and 4.1.2 from the <u>Land Transport Benefits Framework</u> to understand the resilience and security situation at national and regional level. However, we don't currently have data to calculate measure 4.1.1, so this time around we have only calculated measure 4.1.2. The intent of the measure 4.1.2 is to allow for description and measurement of the risk to level of service by unplanned disruption (including earthquakes, storms, volcanos and tsunamis). This measure is generally used for any investment that focuses on maintaining or increasing the resilience of the transport network.

| Benefit framework measure   | Units  |
|---|--|
| 4.1.1 Availability of a viable alternative to high-risk and high-impact route | Percentage of high-risk, high-impact route with a viable alternative                               |
| 4.1.2 Level of service and risk   | Number of identified sites in region by combined risk rating (future, geological and hydrological) |

#### Notes, caveats and data limitations:

- The data for the following measure is sourced from the National Resilience Assessment Tool (NRAT) managed by NZTA.<sup>64</sup>
- The following table shows the regional number of resilience risks on state highways under each risk band. This includes hydrological, geological and future risks.
- 'No rating' is for considered risk sites that have not yet been rated.
- There is no easy way to currently calculate future projections for this measure, but we are working on the capability to do so.

| Regions                 | Critical | High | Moderate | Low  | No rating |
|-------------------------|----------|------|----------|------|-----------|
| 01 – Northland          | 29       | 84   | 276      | 171  | 169       |
| 02 – Auckland           | 5        | 13   | 29       | 41   | 1         |
| 03 – Waikato            | 20       | 175  | 212      | 174  | 149       |
| 04 – Bay of Plenty      | 16       | 64   | 153      | 121  | 67        |
| 05 – Gisborne           | 1        | 7    | 35       | 49   | 74        |
| 06 – Hawke's Bay        | 18       | 123  | 72       | 30   | 143       |
| 07 – Taranaki           | 0        | 11   | 9        | 0    | 98        |
| 08 – Manawatū-Whanganui | 1        | 11   | 9        | 8    | 8         |
| 09 – Wellington         | 39       | 37   | 25       | 118  | 1         |
| 10 – Top of the South   | 9        | 51   | 59       | 177  | 91        |
| 11 – Canterbury         | 32       | 88   | 57       | 195  | 46        |
| 12 – West Coast         | 34       | 49   | 21       | 34   | 37        |
| 13 – Otago              | 26       | 84   | 86       | 247  | 172       |
| 14 – Southland          | 27       | 23   | 18       | 28   | 14        |
| National                | 257      | 820  | 1061     | 1393 | 1070      |

-

<sup>64</sup> https://national-resilience-assessment-tool-nzta.hub.arcgis.com/

### **Economic prosperity**

This transport outcome is about supporting economic activity via local, regional, and international connections, with efficient movements of people and products. We calculated the following strategic measures from the <u>Land Transport Benefits Framework</u> to measure the economic prosperity outcomes at both regional and national level.

| Benefit framework measure  | Units   |
|--|---|
| 5.1.2 Travel time reliability – motor vehicles (note for this evidence pack, the data only relates to state highway traffic monitoring system (TMS) sites) | Calculated using coefficient of variation (CoV); standard deviation of travel time divided by average minutes travel time  Rate: Low <0.3, Medium 0.3–0.6, High >0.6) |
| 5.1.3 Travel time delay  | Difference between average travel time during AM peak<br>and average travel time during the Inter Peak in minutes<br>per kilometre (by mode) as a percentage          |
| 5.2.2 Freight – mode share value   | Percentage of value for each mode   |
| 5.2.3 Freight – mode share weight  | Percentage of weight for each mode  |

#### Notes, caveats and limitations:

- Data for travel time reliability and delay measures is sourced from the National Network Performance (NNP) platform managed by NZTA.
- The sources used to calculate following measures is limited to the TMS sites only that is, for state highways. In future, as more data is available in NNP for local roads, we intend to calculate using extensive local and state highway roads. Additionally, NNP will be able to assess both travel time delay and travel time reliability.
- The data for 5.1.2 Travel time reliability and 5.1.3 Travel time delay is for a typical day.
- Where we have gained access to regional model origin—destination data (for Auckland, Waikato, Wellington and Christchurch), we have used this to estimate current and future values of travel time for all available modes.
- Measure 5.2.2 Freight mode share value has been selected as one of the 14 strategic measures but currently, there is insufficient data to reliably calculate this. Therefore, the data table for this measure remains unpopulated as a placeholder.
- Measure 5.2.3 Freight mode share weight would ideally include coastal shipping but currently only includes road and rail modes.
- Future road freight is based on the same data used to forecast heavy commercial vehicle (HCV) VKT (also used for other measures) combined with average cargo weight from weigh-in-motion (WiM) sites (collected for the North Island only, but also applied to the South Island due to lack of data from the South Island). This data covers seven years and shows a trend of average load sizes decreasing over time. This trend line was used to estimate the 2048 average cargo weight (4615kg). Compared to the 2024 value (4822kg), this implies the average load size is projected to decrease by 7%. In contrast, national HCV VKT is projected to increase by 39% (2024 to 2048).
- The last seven years of rail freight net tonne-kilometres (NTK) by line segment has been provided by KiwiRail. This indicates that the amount of freight is reasonably steady over this period (with a small decline over the last few years). Based on the overall trend, we have assumed future year (2048) NTK will remain the same as current day (2024)
- A discrepancy in the rail data has been noted, where a 27km section of the network is missing from the calculations. This is possibly the section between Palmerston North and Woodville, which has been noted for further follow up.

## 5.1.2 Travel time reliability – motor vehicles

| Region                  | Daily (CoV) | Peak time (CoV) |       |         |        |        |
|-------------------------|-------------|-----------------|-------|---------|--------|--------|
|                         | Low         | Medium          | High  | Low     | Medium | High   |
| 01 – Northland          | 96.43%      | 3.57%           | 0.00% | 88.24%  | 0.00%  | 11.76% |
| 02 – Auckland           | 96.67%      | 2.50%           | 0.83% | 78.57%  | 9.18%  | 12.24% |
| 03 – Waikato            | 94.59%      | 1.35%           | 4.05% | 95.00%  | 0.00%  | 5.00%  |
| 04 – Bay of Plenty      | 100.00%     | 0.00%           | 0.00% | 80.56%  | 19.44% | 0.00%  |
| 05 – Gisborne           | 96.30%      | 3.70%           | 0.00% | 100.00% | 0.00%  | 0.00%  |
| 06 – Hawke's Bay        | 98.95%      | 1.05%           | 0.00% | 65.38%  | 34.62% | 0.00%  |
| 07 – Taranaki           | 94.74%      | 5.26%           | 0.00% | 69.44%  | 16.67% | 13.89% |
| 08 – Manawatū-Whanganui | 92.11%      | 7.89%           | 0.00% | 82.56%  | 8.14%  | 9.30%  |
| 09 – Wellington         | 92.37%      | 6.78%           | 0.85% | 67.90%  | 30.86% | 1.23%  |
| 10 - Top of the South   | 100.00%     | 0.00%           | 0.00% | 86.49%  | 10.81% | 2.70%  |
| 11 – Canterbury         | 94.39%      | 3.96%           | 1.65% | 73.98%  | 16.84% | 9.18%  |
| 12 – West Coast         | 96.30%      | 1.23%           | 2.47% | 98.08%  | 0.00%  | 1.92%  |
| 13 – Otago              | 92.59%      | 6.79%           | 0.62% | 75.56%  | 17.78% | 6.67%  |
| 14 – Southland          | 93.27%      | 5.77%           | 0.96% | 71.43%  | 21.43% | 7.14%  |
| National                | 95.30%      | 3.84%           | 0.86% | 77.34%  | 15.54% | 7.12%  |

## 5.1.3 Travel time delay

| Region                  | Peak (mins/km) | Inter-peak<br>(mins/km) | Difference<br>(mins/km) | %Change |
|-------------------------|----------------|-------------------------|-------------------------|---------|
| 01 – Northland          | 0.78           | 0.85                    | 0.7                     | 8.40%   |
| 02 – Auckland           | 0.77           | 0.86                    | 0.8                     | 10.23%  |
| 03 – Waikato            | 0.79           | 0.87                    | 0.8                     | 9.17%   |
| 04 – Bay of Plenty      | 0.69           | 0.76                    | 0.6                     | 8.18%   |
| 05 – Gisborne           | 0.75           | 0.77                    | 0.2                     | 3.30%   |
| 06 – Hawke's Bay        | 0.79           | 0.87                    | 0.7                     | 9.15%   |
| 07 – Taranaki           | 0.80           | 0.88                    | 0.7                     | 8.46%   |
| 08 – Manawatū-Whanganui | 0.73           | 0.78                    | 0.4                     | 5.72%   |
| 09 – Wellington         | 0.83           | 1.00                    | 0.2                     | 16.94%  |
| 10 - Top of the South   | 0.82           | 0.84                    | 0.1                     | 1.98%   |
| 11 – Canterbury         | 0.75           | 0.77                    | 0.2                     | 3.46%   |
| 12 – West Coast         | 0.74           | 0.77                    | 0.2                     | 3.13%   |
| 13 – Otago              | 0.74           | 0.78                    | 0.3                     | 4.69%   |
| 14 – Southland          | 0.73           | 0.76                    | 0.2                     | 3.23%   |
| National                | 0.76           | 0.83                    | 0.6                     | 8.17%   |

## 5.2.3 Freight – mode share weight – base year 2024

| Region                  | Road (m<br>NKT/yr) | Rail (m<br>NKT/yr) | Total (m<br>NKT/yr) | Road (%) | Rail (%) |
|-------------------------|--------------------|--------------------|---------------------|----------|----------|
| 01 – Northland          | 912                | 17                 | 929                 | 98%      | 2%       |
| 02 – Auckland           | 2904               | 132                | 3036                | 96%      | 4%       |
| 03 – Waikato            | 5016               | 751                | 5767                | 87%      | 13%      |
| 04 – Bay of Plenty      | 2208               | 534                | 2742                | 81%      | 19%      |
| 05 – Gisborne           | 301                | 0                  | 301                 | 100%     | 0%       |
| 06 – Hawke's Bay        | 1120               | 31                 | 1152                | 97%      | 3%       |
| 07 – Taranaki           | 603                | 59                 | 661                 | 91%      | 9%       |
| 08 – Manawatū-Whanganui | 1824               | 646                | 2470                | 74%      | 26%      |
| 09 – Wellington         | 1004               | 102                | 1106                | 91%      | 9%       |
| 10 – Top of the South   | 1193               | 60                 | 1253                | 95%      | 5%       |
| 11 – Canterbury         | 4045               | 563                | 4608                | 88%      | 12%      |
| 12 – West Coast         | 409                | 313                | 722                 | 57%      | 43%      |
| 13 – Otago              | 1396               | 220                | 1616                | 86%      | 14%      |
| 14 – Southland          | 776                | 73                 | 849                 | 91%      | 9%       |
| 15 – Chatham Islands    | 0                  | 0                  | 0                   | 100%     | 0%       |
| Grand total             | 23,712             | 3,500              | 27,212              | 87%      | 13%      |

## 5.2.3 Freight – mode share weight – future year 2048

| Region                  | Road (m<br>NKT/yr) | Rail (m<br>NKT/yr) | Total (m<br>NKT/yr) | Road (%) | Rail (%) |
|-------------------------|--------------------|--------------------|---------------------|----------|----------|
| 01 – Northland          | 912                | 17                 | 929                 | 98%      | 2%       |
| 02 – Auckland           | 2,904              | 132                | 3,036               | 96%      | 4%       |
| 03 – Waikato            | 5,016              | 751                | 5,767               | 87%      | 13%      |
| 04 – Bay of Plenty      | 2,208              | 534                | 2,742               | 81%      | 19%      |
| 05 – Gisborne           | 301                | 0                  | 301                 | 100%     | 0%       |
| 06 – Hawke's Bay        | 1,120              | 31                 | 1,152               | 97%      | 3%       |
| 07 – Taranaki           | 603                | 59                 | 661                 | 91%      | 9%       |
| 08 – Manawatū-Whanganui | 1,824              | 646                | 2,470               | 74%      | 26%      |
| 09 – Wellington         | 1,004              | 102                | 1,106               | 91%      | 9%       |
| 10 – Top of the South   | 1,193              | 60                 | 1,253               | 95%      | 5%       |
| 11 – Canterbury         | 4,045              | 563                | 4,608               | 88%      | 12%      |
| 12 – West Coast         | 409                | 313                | 722                 | 57%      | 43%      |
| 13 – Otago              | 1,396              | 220                | 1,616               | 86%      | 14%      |
| 14 – Southland          | 776                | 73                 | 849                 | 91%      | 9%       |
| 15 – Chatham Islands    | 0                  | 0                  | 0                   | 100%     | 0%       |
| Grand total             | 23,712             | 3,500              | 27,212              | 87%      | 13%      |

## **Environmental sustainability**

This transport outcome is about transitioning to net zero carbon emissions, and maintaining or improving biodiversity, water quality and air quality. We calculated following strategic measures from the <u>Land Transport Benefits Framework</u> to the measure the economic prosperity outcomes at both regional and national level.

| Benefit framework measure                     | Units   |
|---|---|
| 8.1.1 Greenhouse gas emissions (all vehicles) | Annual tonnes of CO <sub>2</sub> equivalents (CO <sub>2</sub> -e) emitted |
| 8.1.3 Light vehicle use impacts               | Annual light vehicle kilometres travelled (light VKT)                     |

#### Notes, caveats and limitations:

- Current year data for VKT is sourced from NZTA's open data portal.
- Future light national VKT projections have been sourced from the NZTA 2024 Light VKT projection models. These are based on Stats NZ population growth and forecasts for GDP and fuel prices (mid-range assumptions have been adopted for this evidence pack).
- Future regional light vehicle VKT distribution is based on research work done by Beca (VKT and GHG emissions baseline report NZTA research note 008 September 2022). This assumes the base year light VKT per capita remains unchanged and uses population projection to estimate light VKT within each territorial local authority (TLA). The results are aggregated to spatial areas and adjusted to reconcile with the Ministry of Transport (MoT) observed and projected national totals. It uses base and projected light vehicle fleet GHG emissions factors from the Vehicle Fleet Emission Model (VFEM) to calculate GHG emissions for the baseline spatial areas. The report year 2035 (future) VKT values (by region) have been adjusted (scaled) to 2048 national light vehicle (LV) totals.
- Future year regional heavy vehicle VKT distribution has been calculated using growth factors
  comprising trend data, Stats NZ medium population forecast and Ministry of Business, Innovation
  and Employment (MBIE) GDP forecast data. This is a placeholder calculation pending further
  work on HCV demand forecasting currently being developed (using this general approach) as part
  of the PIE programme.
- GHG emissions have been estimated by applying light and heavy VKT to <u>Vehicle Emissions</u>
   <u>Prediction Model</u> (VEPM) (v7.0) emission rates (for current and future years) using the default
   MoT Vehicle Fleet Model (VFM) assumptions within VEPM (for each year) and average vehicle
   speeds from NNP or regional transport models (Auckland, Waikato, Wellington and Christchurch).
- Estimates of VKT are key inputs to multiple measures (such as vehicle emissions (affecting both health and environmental measures), DSIs, freight etc. Care has been taken to ensure consistency at the national, regional and local levels.

## 8.1.1 Greenhouse gas emissions (all vehicles)

| Region                  | Current 2024 | Future 2048 | Change | % Change | Contribution |
|-------------------------|--------------|-------------|--------|----------|--------------|
| 01 – Northland          | 0.61         | 0.27        | -0.35  | -57%     | 4%           |
| 02 – Auckland           | 3.58         | 2.19        | -1.38  | -39%     | 26%          |
| 03 – Waikato            | 2.00         | 1.36        | -0.64  | -32%     | 14%          |
| 04 – Bay of Plenty      | 1.01         | 0.63        | -0.38  | -38%     | 7%           |
| 05 – Gisborne           | 0.13         | 0.07        | -0.06  | -48%     | 1%           |
| 06 – Hawke's Bay        | 0.52         | 0.30        | -0.22  | -42%     | 4%           |
| 07 – Taranaki           | 0.35         | 0.19        | -0.16  | -46%     | 3%           |
| 08 – Manawatū-Whanganui | 0.87         | 0.49        | -0.38  | -44%     | 6%           |
| 09 – Wellington         | 0.93         | 0.45        | -0.48  | -52%     | 7%           |
| 10 – Top of the South   | 0.51         | 0.36        | -0.15  | -30%     | 4%           |
| 11 – Canterbury         | 1.98         | 1.26        | -0.71  | -36%     | 14%          |
| 12 – West Coast         | 0.17         | 0.10        | -0.08  | -44%     | 1%           |
| 13 – Otago              | 0.78         | 0.40        | -0.38  | -48%     | 6%           |
| 14 – Southland          | 0.38         | 0.21        | -0.17  | -46%     | 3%           |
| 15 - Chatham Islands    | 0.002        | 0.001       | -0.001 | -39%     | 0.02%        |
| National                | 13.83        | 8.29        | -5.54  | -40%     | 100%         |

## 8.1.3 Light vehicle use impacts

| Region                  | Current 2024 | Future 2048 | Change | % Change | Contribution |
|-------------------------|--------------|-------------|--------|----------|--------------|
| 01 – Northland          | 2172         | 2075        | -97    | -4%      | 5%           |
| 02 – Auckland           | 13137        | 20504       | 7367   | 56%      | 29%          |
| 03 – Waikato            | 5597         | 6514        | 918    | 16%      | 12%          |
| 04 – Bay of Plenty      | 3056         | 3349        | 293    | 10%      | 7%           |
| 05 – Gisborne           | 369          | 420         | 52     | 14%      | 1%           |
| 06 – Hawke's Bay        | 1581         | 1810        | 229    | 14%      | 3%           |
| 07 – Taranaki           | 1199         | 1397        | 198    | 17%      | 3%           |
| 08 – Manawatū-Whanganui | 2702         | 2523        | -179   | -7%      | 6%           |
| 09 – Wellington         | 3488         | 4746        | 1258   | 36%      | 8%           |
| 10 - Top of the South   | 1484         | 1854        | 370    | 25%      | 3%           |
| 11 – Canterbury         | 6182         | 8583        | 2402   | 39%      | 14%          |
| 12 – West Coast         | 494          | 476         | -18    | -4%      | 1%           |
| 13 – Otago              | 2610         | 2624        | 14     | 1%       | 6%           |
| 14 – Southland          | 1175         | 1182        | 7      | 1%       | 3%           |
| 15 - Chatham Islands    | 5            | 4           | -0.4   | -7.9%    | 0%           |
| National                | 45250        | 58062       | 12812  | 28%      | 100%         |

#### Inclusive access

This transport outcome is about enabling all people to participate in society through access to social and economic opportunities, such as work, education and health care. We calculated the 10.2.1 and 10.3.1 strategic measures from the <u>Land Transport Benefits Framework</u> to measure the inclusive access outcome both at the national and regional level.

| Benefit framework measure                            | Units   |
|--|---|
| 10.2.1 People – mode share                           | Percentage by mode (Census (2023) journey to work and education)  |
| 10.3.1 Access to key social destinations (all modes) | Number of jobs (x1000) accessible by mode in AM peak (car 40 min, PT 45 min, cycle 45 min) and distance from city centre (km) |

#### Notes, caveats and limitations:

- There is a limited information about measure 10.2.1 in the <u>Land Transport Benefits Framework</u> measures manual that is, its intent, scope, forecasting methods etc are not defined yet.
- Mode share data, that is main means of travel to work and education, is sourced from census 2023 outputs produced by Stats NZ.<sup>65</sup>
- The data for all public transport (PT) modes (buses, trains and ferries) is aggregated together.
- Where we have gained access to regional model origin—destination data (for Auckland, Waikato, Wellington and Christchurch), we've used this to estimate current and future values of 10.2.1 People – mode share based on modelled relative changes applied to the base year census values.

#### 10.2.1 People - mode share

| Region                  | %Car   | %PT    | %Cycle | %Peds  |
|-------------------------|--------|--------|--------|--------|
| 01 – Northland          | 91.00% | 1.33%  | 0.99%  | 6.67%  |
| 02 – Auckland           | 77.81% | 11.29% | 1.32%  | 9.58%  |
| 03 – Waikato            | 86.34% | 2.69%  | 2.49%  | 8.48%  |
| 04 – Bay of Plenty      | 87.36% | 2.06%  | 3.37%  | 7.22%  |
| 05 – Gisborne           | 89.78% | 0.43%  | 2.54%  | 7.25%  |
| 06 – Hawke's Bay        | 88.12% | 0.99%  | 2.96%  | 7.93%  |
| 07 – Taranaki           | 87.18% | 1.25%  | 2.91%  | 8.66%  |
| 08 – Manawatū-Whanganui | 86.33% | 1.77%  | 2.60%  | 9.30%  |
| 09 – Wellington         | 63.97% | 18.40% | 2.98%  | 14.64% |
| 10 – Top of the South   | 80.14% | 1.09%  | 7.53%  | 11.24% |
| 11 – Canterbury         | 85.26% | 0.17%  | 3.27%  | 11.30% |
| 12 – West Coast         | 79.75% | 4.44%  | 6.27%  | 9.54%  |
| 13 – Otago              | 73.35% | 4.38%  | 3.77%  | 18.50% |
| 14 – Southland          | 87.70% | 0.70%  | 3.40%  | 8.21%  |
| Auckland city           | 77.78% | 11.30% | 1.32%  | 9.59%  |

<sup>65</sup> 

https://explore.data.stats.govt.nz/?fs[0]=2023%20Census%2C0%7CTransport%23CAT TRANSPORT%23&pg=0&fc=2023%20Census&bp=true&snb=9

| Region                    | %Car   | %PT    | %Cycle | %Peds  |
|---------------------------|--------|--------|--------|--------|
| Hamilton city             | 82.96% | 4.96%  | 3.08%  | 9.01%  |
| Tauranga city             | 85.33% | 2.92%  | 4.65%  | 7.10%  |
| Wellington city           | 48.62% | 28.51% | 3.59%  | 19.29% |
| Christchurch city         | 77.74% | 5.84%  | 7.20%  | 9.22%  |
| Queenstown-Lakes District | 79.27% | 4.13%  | 5.77%  | 10.83% |
| National total            | 79.45% | 7.46%  | 2.91%  | 10.19% |

#### Accessibility to employment

#### Notes, caveats and limitations:

- Data is sourced from the Accessibility Toolkit (ATK).
- It uses network-based travel times (by mode) between household locations and employment locations. This uses recorded travel times for general traffic, bus timetables for PT and road network distance with a constant average speed applied for cycles (the default used in OpenTripPlanner, which is 5m/s = 18km/h).
- Measure 10.3.1 currently estimates accessibility to employment rather than social destinations.
   Further work is progressing using ATK to also include access to social destinations, which will be included in subsequent versions of this evidence pack.
- ATK has been used to estimate future accessibility in a very limited way by only looking at changes associated with land-use growth based on population and employment sub-regional projections (while keeping base year travel times by mode). It may be possible to improve this in future releases, where other tools (currently being developed) can provide suitable inputs to ATK regarding future network performance (including travel times).

#### 10.3.1 Access to key social destinations (all modes)

| Region             | Mode   | Current year | (2023)  |         | Future year | (2048)  |         |
|--------------------|--|--------------|---------|---------|-------------|---------|---------|
|                    |  | 0–5km        | 5–10km  | 10+km   | 0–5km       | 5–10km  | 10+km   |
| 01 – Northland     | Car  | 31,292       | 30,536  | 35,034  | 36,807      | 35,913  | 40,486  |
|                    | Car PT Cycle Car PT Cycle Car PT Cycle Car PT Cycle Car PT | 16,850       | 5,845   | 869     | 19,200      | 7,465   | 1,311   |
|                    | Cycle  | 29,138       | 19,854  | 2,377   | 34,068      | 24,541  | 3,369   |
| 02 – Auckland      | Car  | 716,503      | 536,916 | 455,088 | 899,714     | 670,758 | 582,690 |
| 1                  | PT   | 313,788      | 177,213 | 124,557 | 388,878     | 224,214 | 151,103 |
|                    | Cycle  | 355,847      | 280,586 | 216,239 | 451,914     | 355,494 | 265,792 |
| 03 – Waikato       | Car  | 133,357      | 133,999 | 213,804 | 176,632     | 177,837 | 276,406 |
|                    | PT   | 69,881       | 25,929  | 9,321   | 95,049      | 33,744  | 12,351  |
|                    | Cycle  | 104,923      | 82,607  | 16,567  | 140,886     | 112,340 | 21,034  |
| 04 – Bay of Plenty | Car  | 79,040       | 77,841  | 93,611  | 103,455     | 101,584 | 107,430 |
|                    | PT   | 35,631       | 23,794  | 18,017  | 47,915      | 32,656  | 20,225  |
|                    | Cycle  | 58,707       | 40,240  | 26,289  | 77,374      | 54,337  | 29,099  |
| 05 – Gisborne      | Car  | 17,327       | 17,265  | 25,979  | 18,308      | 18,254  | 27,378  |
|                    | PT   | 9,241        | 144     | 147     | 9,421       | 137     | 150     |
|                    | Cycle  | 15,211       | 10,255  | 517     | 15,898      | 9,799   | 849     |
| 06 – Hawke's Bay   | Car  | 72,436       | 71,160  | 165,625 | 82,291      | 81,101  | 186,660 |
|                    | PT   | 18,570       | 12,495  | 21,930  | 20,305      | 13,607  | 26,451  |
|                    | Cycle  | 27,802       | 26,148  | 59,881  | 30,745      | 29,448  | 70,751  |
| 07 – Taranaki      | Car  | 36,869       | 36,779  | 81,917  | 41,180      | 40,985  | 91,527  |
|                    | PT   | 17,946       | 6,379   | 3,989   | 19,839      | 7,537   | 4,939   |

|                       | Cycle | 27,594    | 21,814    | 5,315     | 30,784    | 26,806    | 6,171     |
|-----------------------|-------|-----------|-----------|-----------|-----------|-----------|-----------|
| 08 – Manawatū-        | Car   | 63,400    | 60,858    | 116,324   | 70,215    | 68,118    | 129,915   |
| Whanganui             | PT    | 42,455    | 8,809     | 12,769    | 47,710    | 12,863    | 14,373    |
|                       | Cycle | 49,725    | 27,467    | 15,275    | 55,486    | 31,480    | 16,815    |
| 09 – Wellington       | Car   | 226,937   | 203,306   | 257,735   | 254,242   | 227,977   | 286,594   |
|                       | PT    | 149,015   | 87,351    | 100,318   | 169,490   | 97,902    | 112,643   |
|                       | Cycle | 160,012   | 138,296   | 82,987    | 178,699   | 153,837   | 93,008    |
| 10 – Top of the South | Car   | 59,509    | 39,238    | 43,526    | 65,205    | 43,653    | 48,604    |
|                       | PT    | 33,554    | 20,850    | 2,236     | 36,531    | 23,406    | 2,550     |
|                       | Cycle | 48,104    | 34,767    | 5,135     | 52,973    | 39,147    | 5,744     |
| 11 – Canterbury       | Car   | 246,820   | 237,377   | 350,704   | 298,103   | 286,139   | 440,946   |
|                       | PT    | 135,521   | 83,670    | 25,420    | 164,523   | 99,853    | 33,350    |
|                       | Cycle | 197,173   | 163,672   | 46,480    | 238,400   | 196,568   | 59,540    |
| 12 – West Coast       | Car   | 6,225     | 6,455     | 14,589    | 5,843     | 6,196     | 13,893    |
|                       | PT    | 3,757     | 183       | 1,862     | 3,445     | 210       | 2,326     |
|                       | Cycle | 5,537     | 4,664     | 3,015     | 5,099     | 4,604     | 3,432     |
| 13 – Otago            | Car   | 59,213    | 58,364    | 112,598   | 62,075    | 61,521    | 128,941   |
|                       | PT    | 45,898    | 27,674    | 13,916    | 48,301    | 33,897    | 16,699    |
|                       | Cycle | 53,343    | 41,614    | 12,458    | 55,959    | 47,303    | 15,473    |
| 14 – Southland        | Car   | 32,733    | 33,106    | 69,145    | 34,463    | 34,638    | 71,342    |
|                       | PT    | 20,598    | 10,281    | 2,169     | 21,320    | 13,138    | 2,138     |
|                       | Cycle | 27,027    | 22,387    | 4,685     | 28,399    | 26,232    | 4,374     |
| National              | Car   | 1,781,661 | 1,543,200 | 2,035,679 | 2,148,533 | 1,854,674 | 2,432,812 |
|                       | PT    | 912,705   | 490,617   | 337,520   | 1,091,927 | 600,629   | 400,609   |
|                       | Cycle | 1,160,143 | 914,371   | 497,220   | 1,396,684 | 1,111,936 | 595,451   |
|                       |       |           |           |           |           |           |           |

## **Appendix B: Intervention Catalogue**

As part of the PIE programme, NZTA is developing the Intervention Catalogue (IC) tool, which compiles a wide range of empirical data relating to the implementation of transport projects and how effective they have been in achieving the intended outcomes. We'll continue to add to this over time, using data from benefit realisation associated with the investment logic mapping (ILM) process.

An Al interface for supporting queries and providing relevant evidence is currently being investigated.

For this evidence pack, a limited subset of data (related to 80 interventions) based on the <u>KonSULT</u> knowledgebase maintained by the University of Leeds in the UK, on sustainable urban land use and transport has been made available to demonstrate how IC might be applied to explore and identify the effectiveness of various interventions as part of the option formulation process.

Effectiveness is reported using a simple qualitative 1–5 scale that is indicative rather than absolute, and results may vary based on context.

The screenshot in Figure 5 shows the interventions we extracted from the KonSULT knowledgebase. This data is available in the summary spreadsheet: <a href="mailto:Extract-of-IC-KonSULT-data-(interventions-typology).xlsx">Extract-of-IC-KonSULT-data-(interventions-typology).xlsx</a>.

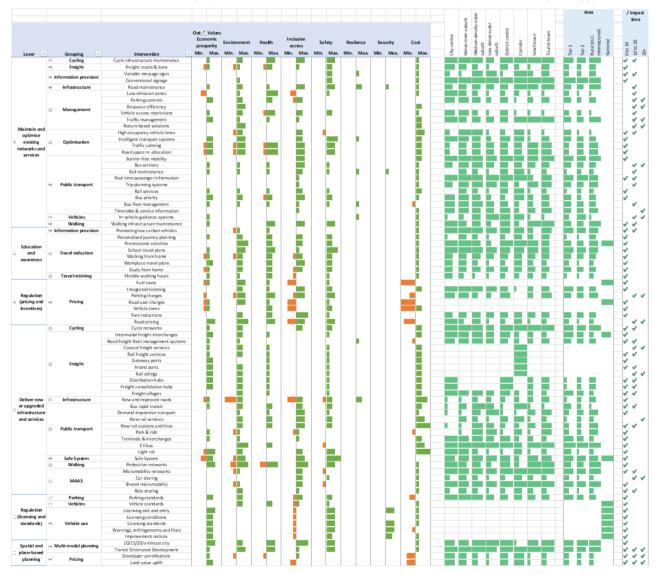


Figure 5: Extract of IC KonSULT data

We've used the data shown in Figure 5 to create a draft interactive tool (<u>Spreadsheet-deficiency-to-intervention-example.xlsx</u>) that allows users to explore the effectiveness and trade-offs associated with a range of interventions that are associated with a user-specified list of issues or deficiencies.

The tables shown in the screenshots below are examples of how the tool can be used (and is not necessarily recommending any of the interventions currently selected).

| User Inputs   | Intervention Catalogue                               |  | 4) Select<br>Area Type | 5) Review I | klely effecti | effectiveness of se |      |
|---|--|--|------------------------|-------------|---------------|---------------------|------|
| Issue/Deficiency  | Intervention Group                                   | IC Interventions   | IC Lever               |             | Effectiveness | Cost                |      |
| 1) User to provide list of issues/deficencies below   | 2) User drop down menus to explore availble Groups   | 3) User drop down menus to explore Interventions in Group    |                        | Area        | (1-5)         | Min.                | Max. |
| Consolidate growth, shorten trip lengths, co locating transport hubs with community services  | Regulation (pricing and incentives)                  | Public transport fare reductions                             | Pricing                | Tier 1      | 3             | 0                   | 0    |
| Design and Planning - adaptable 'scenarios-based'<br>(defend, accommodate, retreat), identify critical<br>routes, improve operational responses to events | Spatial and place-based planning                     | Design and Planning  | Resiliance             | Tier 1      | 0             | 0                   | 0    |
| perceived safety (incl. crime)  | Deliver new or upgraded infrastructure and services  | Safe system approach   | Safe System            | Tier 1      | 4             | 0                   | 0    |
| prioritise low risk low cost maintenance projects   | Maintain and optimise existing networks and services | Maintaining the existing road network level of service       | Infrastructure         | Tier 1      | 3             | 0                   | 1    |
| Implement high quality improvements that bring about mode change  | Maintain and optimise existing networks and services | Conversion of road capacity to shared and active modes       | Optimisation           | Tier 1      | 2             | 0                   | 2    |
| perceived safety (incl. crime)  | Deliver new or upgraded infrastructure and services  | Safe system approach   | Safe System            | Tier 1      | 4             | 0                   | 0    |
| rapid transport network   | Spatial and place-based planning                     | Spatially integrated land use and transport networks         | Multi-modal planning   | Tier 1      | 4             | 0                   | 1    |
| Improved services   | Deliver new or upgraded infrastructure and services  | Fixed line mass public transport                             | Public transport       | Tier 1      | 3             | 0                   | 5    |
| Road pricing  | Regulation (pricing and incentives)                  | Time and distance based charges                              | Pricing                | Tier 1      | 2             | -4                  | 0    |
|   | Regulation (pricing and incentives)                  | Public transport fare reductions                             | Pricing                | Tier 1      | 3             | 0                   | 0    |
| dangerous behavior  | Deliver new or upgraded infrastructure and services  | Safe system approach   | Safe System            | Tier 1      | 4             | 0                   | 0    |
| Encourage Evs (low emission zones)  | Maintain and optimise existing networks and services | Banning polluting vehicles from a defined area               | Management             | Tier 1      | 2             | 0                   | 1    |
| Encourage active modes  | Deliver new or upgraded infrastructure and services  | Networks for small, low powered, low speed transport devices | MAAS                   | Tier 1      | 4             | 0                   | 1    |
| Encourage active modes  | Education and awareness                              | School based travel behaviour change                         | Travel reduction       | Tier 1      | 4             | 0                   | 1    |
| Accessible infrastructure   | Deliver new or upgraded infrastructure and services  | On call shared transport                                     | Public transport       | Tier 1      | 2             | 0                   | 1    |
| Adaptable approach to road space management (e-scooters)  | Deliver new or upgraded infrastructure and services  | Networks for small, low powered, low speed transport devices | MAAS                   | Tier 1      | 4             | 0                   | 1    |
| More Freq Rail &PT Services   | Deliver new or upgraded infrastructure and services  | New rail services on existing lines                          | Public transport       | Tier 1      | 1             | 0                   | 3    |
| Bus Priority  | Maintain and optimise existing networks and services | Reduce journey times and improve reliability of bus services | Public transport       | Tier 1      | 3             | 0                   | 1    |

Figure 6: Example of using tool to explore overall effectiveness and cost of potential interventions based on a list of user specified deficiencies or issues (entered in the first column)

| User Inputs   | Intervention Catalogue                                    |      |   |      |      | MoT Outc | ome(s) |          |                       |      |      |      |            |  |
|---|---|------|---|------|------|----------|--------|----------|-----------------------|------|------|------|------------|--|
| Issue/Deficiency                                      | IC Interventions  |      | • |      |      |          |        | Inclusiv | clusive access Safety |      |      |      | Resilience |  |
| User to provide list of issues/deficencies below      | 3) User drop down menus to explore Interventions in Group | Min. | Max.                                    | Min. | Max. | Min.     | Max.   | Min.     | Max.                  | Min. | Max. | Min. | Max.       |  |
| Consolidate growth, shorten trip lengths, co locating | Public transport fare reductions                          |      |   |      |      |          |        |          |                       |      |      |      |            |  |
| transport hubs with community services                |   | 0    | 0                                       | 0    | 2    | 0        | 2      | 0        | 4                     | 0    | 1    | 0    | 0          |  |
| Design and Planning - adaptable 'scenarios-based'     | Design and Planning                                       |      |   |      |      |          |        |          |                       |      |      |      |            |  |
| (defend, accommodate, retreat), identify critical     |   |      |   |      |      |          |        |          |                       |      |      |      |            |  |
| routes, improve operational responses to events       |   |      |   |      |      |          |        |          |                       |      |      |      |            |  |
|   |   | 0    | 0                                       | 0    | 0    | 0        | 0      | 0        | 0                     | 0    | 0    | 0    | 0          |  |
| perceived safety (incl. crime)                        | Safe system approach                                      |      |   |      |      |          |        |          |                       |      |      |      |            |  |
|   |   | -2   | 2                                       | -1   | 3    | 0        | 0      | 0        | 3                     | 0    | 5    | 0    | 0          |  |
| prioritise low risk low cost maintenance projects     | Maintaining the existing road network level of            |      |   |      |      |          |        |          |                       |      |      |      |            |  |
|   | service   | 0    | 1                                       | 0    | 2    | 0        | 1      | 0        | 3                     | 0    | 3    | 0    | 2          |  |
|   | Conversion of road capacity to shared and active          |      |   |      |      |          |        |          |                       |      |      |      |            |  |
| about mode change                                     | modes   | -1   | 2                                       | -1   | 3    | -1       | 4      | 0        | 3                     | 0    | 3    | 0    | 0          |  |
| perceived safety (incl. crime)                        | Safe system approach                                      |      |   |      |      |          |        |          |                       |      |      |      |            |  |
|   |   | -2   | 2                                       | -1   | 3    | 0        | 0      | 0        | 3                     | 0    | 5    | 0    | 0          |  |
| rapid transport network                               | Spatially integrated land use and transport               |      |   |      |      |          |        |          |                       | l .  |      |      |            |  |
|   | networks  | 0    | 3                                       | 0    | 2    | 0        | 3      | 0        | 4                     | 0    | 3    | 0    | 0          |  |
| Improved services                                     | Fixed line mass public transport                          |      |   |      |      |          | .      |          |                       |      |      |      |            |  |
| David addison   | Time and distance based charges                           | -1   | 3                                       | 0    | 2    | 0        | 0      | -3       | 2                     | 0    | 3    | 0    | 0          |  |
|   | Public transport fare reductions                          | 0    | 0                                       | 0    | 2    | 0        | 2      | 0        | 4                     | 0    | 1    | 0    | 0          |  |
| Road safety plans, safe speed limits, reduce          | Safe system approach                                      | U    | U                                       |      | 2    | U 0      | 2      | U        | - 4                   | "    | 1    | "    | U          |  |
| dangerous behavior                                    | sale system approach                                      | -2   | 2                                       | -1   | 3    | 0        | 0      | 0        | 3                     | 0    | 5    | 0    | 0          |  |
| Encourage Evs (low emission zones)                    | Banning polluting vehicles from a defined area            | -2   | - 2                                     | -1   | 3    |          |        | 0        | 3                     | "    |      | "    | U          |  |
| Encourage 243 (low emission zones)                    | butting politicing vehicles from a defined area           | -2   | 0                                       | 0    | 1    | 0        | 4      | -2       | 0                     | 0    | 1    | 0    | 0          |  |
| Encourage active modes                                | Networks for small, low powered, low speed                |      | '                                       |      |      | ľ        | -      | -2       | ,                     |      |      | "    | U          |  |
|   | transport devices   | 0    | 0                                       | -1   | 1    | 0        | 0      | 0        | 2                     | -1   | 0    | 0    | 0          |  |
| Encourage active modes                                | School based travel behaviour change                      | 0    | 1                                       | 0    | 3    | 0        | 3      | 0        | 1                     | 0    | 4    | 0    | 0          |  |
|   | On call shared transport                                  | -    |   | -    |      |          |        | 1        |                       | -    |      | -    |            |  |
|   |   | 0    | 0                                       | 0    | 1    | 0        | 1      | 0        | 3                     | 0    | 1    | 0    | 0          |  |
| Adaptable approach to road space management           | Networks for small, low powered, low speed                |      |   |      |      |          |        |          |                       |      |      |      |            |  |
| (e-scooters)  | transport devices   | 0    | 0                                       | -1   | 1    | 0        | 0      | 0        | 2                     | -1   | 0    | 0    | 0          |  |
| More Freq Rail &PT Services                           | New rail services on existing lines                       |      |   |      |      |          |        |          |                       |      |      |      |            |  |
|   |   | 0    | 0                                       | 0    | 2    | 0        | 2      | 0        | 3                     | 0    | 2    | 0    | 0          |  |
| Bus Priority  | Reduce journey times and improve reliability of           |      |   |      |      |          |        |          |                       |      |      |      |            |  |
|   | bus services  | 0    | 2                                       | 0    | 2    | -1       | 2      | 0        | 3                     | 0    | 2    | 0    | 0          |  |

Figure 7: Example of using tool to explore overall trade-offs between outcomes associated with potential interventions